


# SWLR - Espacement optimal

Montage plafond

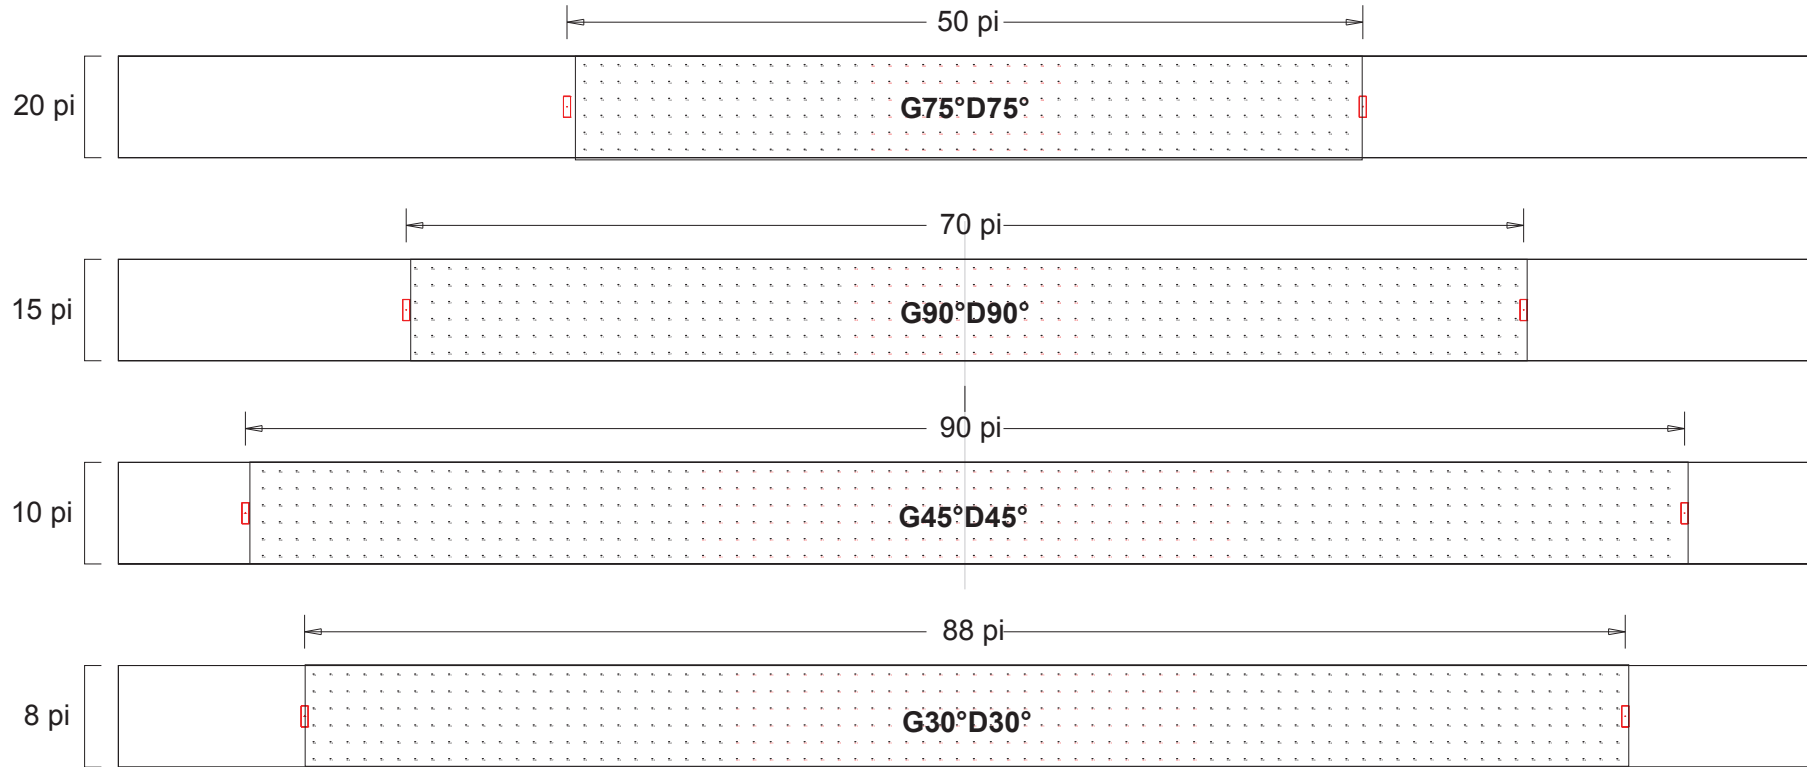

Éclairage optimal en pi

Veuillez choisir l'angle conseillé selon le montage plafond afin d'obtenir un éclairage optimal

| Plafond | Angle    | Couverture de l'éclairage |
|---------|----------|---------------------------|
| 20 pi   | G75°D75° | 50 pi                     |
| 15 pi   | G90°D90° | 70 pi                     |
| 10 pi   | G45°D45° | 90 pi                     |
| 8 pi    | G30°D30° | 88 pi                     |

2233 Rue de l'Aviation, Dorval, QC H9P 2X6, CANADA  
 Tél : 1-866-280-2332, Tél : 514-739-9984 Télécopieur : 514-739-9912

DISCLAIMER: Calculations have been performed according to IESNA & CIE standards and good practice. Some differences between measured values and calculated results may occur due to tolerances in calculation methods, testing procedures, component performance, measurement techniques and field conditions such as voltage and temperature variations. Input data used to generate the attached calculations such as room dimensions, reflectances, furniture and architectural elements significantly affect the lighting calculations. If the real environment conditions do not match the input data, differences will occur between measured values and calculated values.