


# T8 U-BENT TYPE A Ballast Compatible Tube LED Fluorescent Replacement

Ballast compatible fluorescent U-Bent replacement lamps offer a quick and economical solution without any additional wiring needed. Quality glass encasing ensures protection against tube yellowing and brittleness. Compatible with a variety of electronic instant start, rapid start and program start ballasts.

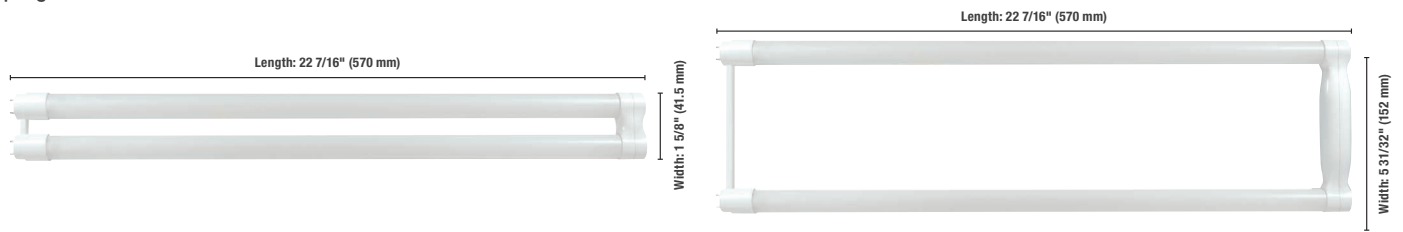

U-Bent U1

U-Bent U6

| Order code    | Description                  | System watts (W) |                  |                  | Base | Color temp. (K) | CRI | Life L70 (hrs) | Lumen output (lm) |                  |                  | Case qty (master) |
|---------------|------------------------------|------------------|------------------|------------------|------|-----------------|-----|----------------|-------------------|------------------|------------------|-------------------|
|               |                              | LBF <sup>1</sup> | NBF <sup>1</sup> | HBF <sup>1</sup> |      |                 |     |                | LBF <sup>1</sup>  | NBF <sup>1</sup> | HBF <sup>1</sup> |                   |
| <b>U-Bent</b> |                              |                  |                  |                  |      |                 |     |                |                   |                  |                  |                   |
| 66985         | T8/S2/15W/840/48/U1/ND/STD   | 16               | 18               | 24               | G13  | 4 000           | 82  | 50 000         | 1 980             | 2 200            | 2 840            | 12                |
| 66986         | T8/S2/11.5W/835/48/U6/ND/STD | 13               | 14               | 20               | G13  | 3 500           | 82  | 50 000         | 1 570             | 1 750            | 2 270            | 12                |
| 66987         | T8/S2/11.5W/840/48/U6/ND/STD | 13               | 14               | 20               | G13  | 4 000           | 82  | 50 000         | 1 620             | 1 800            | 2 330            | 12                |
| 66988         | T8/S2/15W/840/48/U6/ND/STD   | 16               | 18               | 24               | G13  | 4 000           | 82  | 50 000         | 1 980             | 2 200            | 2 840            | 12                |

Lumen values are derived from photometric testing  
For a complete list of compatible ballasts and DLC qualified products, please visit [www.standardpro.com](http://www.standardpro.com)  
This lamp only operates on existing ballast in 120-277/347V application  
<sup>1</sup> LBF= Low ballast factor, NBF= Normal ballast factor, HBF= High ballast factor

