

Series spec sheet

D

NEMA4X REMOTE

MR16 Weatherproof NEMA4X / EEMAC4X

Single, double or triple

6 V, 12 V, & 24 V lamps

The D Series by Stanpro is a fully enclosed die-cast remote emergency light. The gasket seal, ensures that this series will be the perfect choice in an industrial application where water or other contaminants can affect the condition of the unit. The MR16 lamps provide maximum lighting protection in case of power failure. The series is available in single or double heads. The 5" canopy mounts directly to a standard octagon box (not supplied). Standard finish is grey.

FEATURES AND SPECIFICATIONS

• Mechanical

- Die cast, solid aluminum housing
- Die cast, gasketed lamp collar with screw lock
- Fully adjustable - both tilt and swivel
- 5" diameter die cast aluminum canopy standard
- Canopy mounting holes designed to match standard electrical junction boxes
- Grey color is standard
- MR16 lamp designed with low glare reflector and available in 6 V DC, 12 V DC or 24 V DC

• Compliances

- CSA Certified to C22.2 #141-15
- Meets requirements of ICES-005



OVERVIEW

Light source	LED, Incandescent
Input Voltage (V DC)	6, 12, 24

For complete warranty details, please see our terms and conditions on our website.



ORDERING GUIDE - LED

Series	Nbr of heads	Volts (V DC operational)	Watts (W)	Lamp type	Color	Options
D	1 - Single head	06-24V - 6 to 24	4W - 4	LR - LED	GY - Grey (standard)	LCP ¹ - Less Canopy TP - Tamper Proof Screws WGD - Wireguard (order separately) PG - Lexan Guard (seperate order)
	2 - Double head		5W - 5	LA - LED		
	3 - Triple head	12-24V - 12 to 24	6W - 6	LA - LED		
			7W - 7			

¹ Only available for single head configuration.

ORDERING GUIDE - INCANDESCENT

Series	Nbr of heads	Volts (V DC)	Lamp type	Color	Options
D	1 - Single head	06V - 6	See lamp selection chart below	GY - Grey (standard)	LCP ² - Less Canopy TP - Tamper Proof Screws WGD - Wireguard (order separately) PG - Lexan Guard (seperate order)
	2 - Double head	12V - 12			
	3 - Triple head	24V - 24			

² Only available for single head configuration.

LAMP SELECTION - INCANDESCENT

MR16 • Small head	6 V	12 V	24 V
Quartz halogen	10WQ	20WQ, 35WQ	12WQ, 20WQ, 50WQ

LEXAN GUARD

	Part number	Dimensions (in)
1 head	PGD103	7x7.25x8.5
2 heads	PGD104	14x7.25x7.5
3 heads	PGD107	14.5x11.25x5.5

WIREGUARD³


	Part number	Dimension (in)
1 head	WGD630-V2	15.25 x 12.25 x 9.00
2 heads		

³ Please contact your customer service representative for more information.

LUMEN TABLE

Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

DIMENSIONS

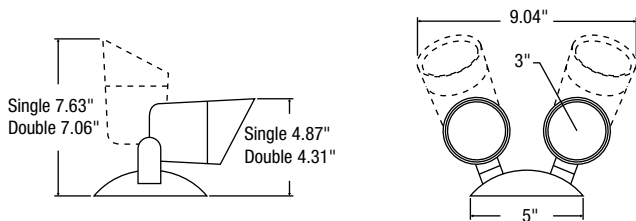

SPACING GUIDE

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.