

Series Spec Sheet

RMEE

EDGE-LIT

The RMEE series is our entry-level edge-lit running man signs. RMEE is surface mount and available in AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

- **Circuitry - AC/DC**
 - LED ultra bright light source
 - 120-347 VAC Input
 - Emergency DC wattages as follows:
6 VDC = 1 W, 12 VDC = 2 W, 24 VDC = 4 W
- **Circuitry - Self-Powered**
 - LED light source
 - 120-347 VAC Input
 - 120-347 V/0.24 A/4 W max power consumption
 - Sealed Ni-Cad battery
 - 120 minutes emergency duration
 - Solid state transfer and battery charger
- **Specifications**
 - Aluminum frame and polycarbonate panel
 - Universal ceiling, wall or side mount
 - Universal single and double face
 - 3 pictograms panels included: 1 without arrow, 2 with arrow.
- **Approvals**
 - CSA Certified to C22.2 #141-15
- **Compliance**
 - Meets requirements of ICES-005

OVERVIEW

Light source	LED
Input voltage (VCA)	120-347
DC voltage/Power	6 VDC = 1 W 12 VDC = 2 W 24 VDC = 4 W

POWER CONSUMPTION TABLE

Model	Voltage	Power	Current
RMEE-IB1	120 V	4 W	0.24 A
	277 V	4 W	0.24 A
	347 V	4 W	0.24 A
RMEE-UDC	120 V	3 W	0.06 A
	277 V	3 W	0.06 A
	347 V	3 W	0.06 A



**quick
ship**



**LED
fixture**



**ICES
005**



Energy Verified
Énergie Vérifiée

For complete warranty details, please see our terms and conditions on our website.

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE ⌚


Part number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts	Color
RMEE-IB1	IB	Universal	LED	120-347	White
RMEE-UDC	UDC	Universal	LED	120-347	White

QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ACCESSORIES (order separately)

Part number	Type
FIBER-RMEE-CG	Running man fiber no arrow

DIMENSIONS

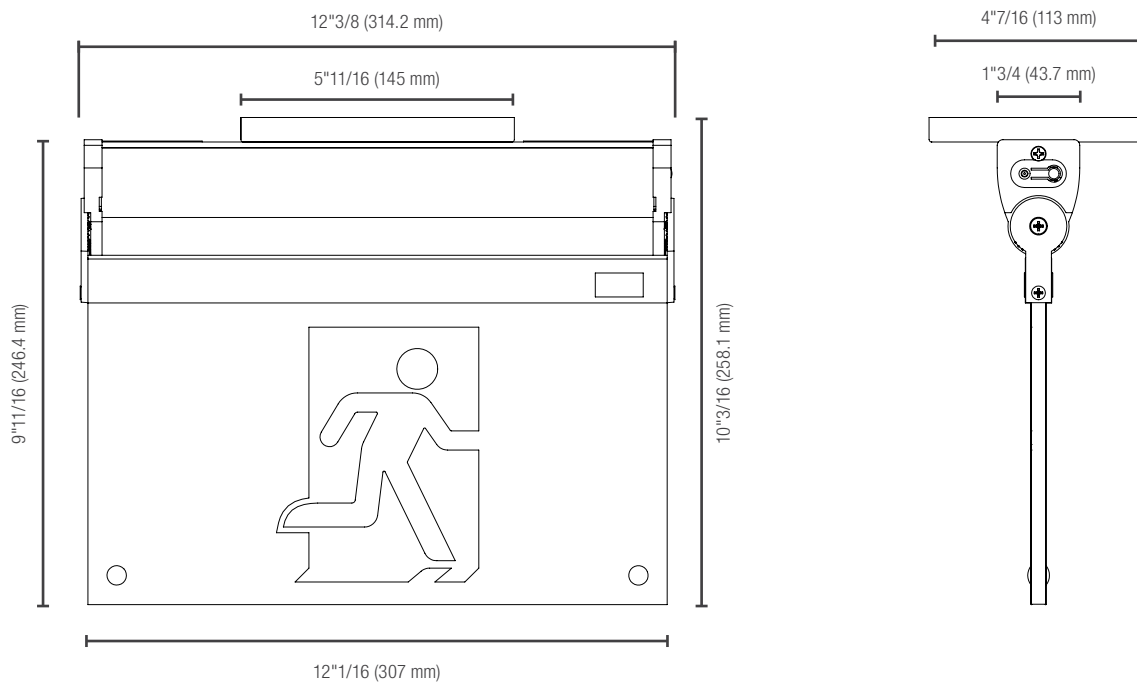

CONFIGURATIONS



Comes standard (single face) with three pictogram legends for direction selection.



For double face no arrow options, please order the RMEE, along with the following fiber: FIBER-RMEE-CG.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.