

Series Spec Sheet

SLESS-SLSES

BILINGUAL STEEL SIGN

NRCan C860 Registered
LED 120/347 VAC Input

The SLESS-SLSES series of commercial steel bilingual exit and sortie signs features a slim profile that eliminates light leaks combined with a simple to install design. Ideal for use in facilities required to meet current bilingual code requirements such as airports or government buildings and institutions. Available in AC only, AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 3.1 W power consumption single or double face
- Emergency DC wattages as follows:
6 VDC = 2.0 W
12 VDC = 3.2 W
24 VDC = 6.7 W

• Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 9.0 W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

• Mechanical

- 20 gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colours optional

• Compliances

- Compliant with CSA C22.2 #141-15




Energy Verified
Énergie Vérifiée

ORDERING GUIDE

Series	Nbr of faces	Mounting*	Letter order	Colour	DC output	Options†
SLESS-SLSES 6" (CSA C860 Approved height)	1 - Single face 2 - Double face	CM - Ceiling mount WM - Wall mount	ES - Exit Sortie SE - Sortie Exit	WH - White (standard) BK - Black GY - Grey SP - Custom colour (specify)	UDC - Universal DC backup voltage 6, 12 or 24VDC selectable IB - Self-powered for 90 minutes	OP, TP, WG**, PG

† For detailed options descriptions, please consult the options page.
* For End Mount please refer to SLEXX/SLSRX.
** Specify mounting.

DIMENSIONS

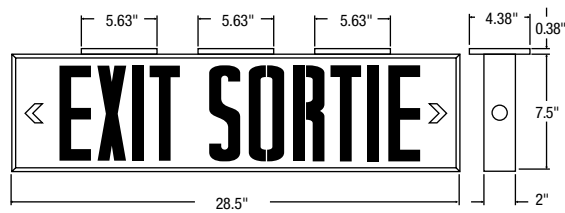

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.