

## Series Spec Sheet

# SLESV-SLSEV

## VANDAL RESISTANT BILINGUAL SIGN

NRCan C860 Registered

LED 120/347 VAC Input

The SLESV-SLSEV series is designed to withstand extremely abusive environments like correctional facilities and schools. The signs are constructed from 16 gauge steel with an integral Lexan shield. Available in AC only, AC/DC and internally self-powered versions.

### FEATURES AND SPECIFICATIONS

#### • Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 9.4 W power consumption single or double face
- Emergency DC wattages as follows:

**6 VDC** = 4.0 W

**12 VDC** = 4.6 W

**24 VDC** = 8.0 W

#### • Circuitry - Self-Powered

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- 7.0 W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration
- Solid state transfer and battery charger

#### • Mechanical

- 16 Gauge heavy-duty steel construction standard
- Solid and durable wrap-around faceplate design
- Snap out directional chevrons/arrows
- Integral Lexan polycarbonate shield behind full steel faceplate to prevent punch through
- Stainless steel, vandal-proof screws standard
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Full width/height, ceiling or end mount canopy
- White powder coat finish standard, other finishes and colours optional

#### • Compliances

- CSA C22.2 #141-15



**ORDERING GUIDE**


Series	Nbr of faces	Mounting <sup>1</sup>	Letter order	Color	DC Voltage	Options <sup>2</sup>
SLESV SLSEV	1 - Single face 2 - Double face	C - Ceiling mount W - Wall mount E - End mount	SE - Sortie Exit ES - Exit Sortie	WH - White (standard) BK - Black GY - Grey WST - Whist SP - Custom color (please specify)	BLANK - AC only UDC - Universal DC backup voltage 6, 12 or 24 VDC selectable IB - Self-powered for 90 minutes	WG <sup>3</sup> , OP, TP, 14GA

<sup>1</sup> Must be specified, canopy is factory installed.

<sup>2</sup> For detailed options descriptions, please consult the options page.

<sup>3</sup> Specify mounting.

**DIMENSIONS**

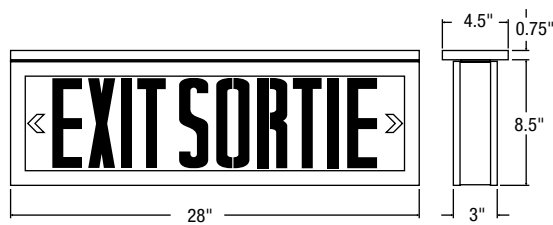

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.