

Series Spec Sheet

SLEXS/SLSRS

STEEL

NRCan C860 Registered

Steel Construction

LED 120/347 V AC Input

The SLEXS/SLSRS series of commercial steel signs features a slim profile that eliminates light leaks combined with a simple, easy to install design. Available in AC only, AC/DC and internally self-powered versions.

FEATURES AND SPECIFICATIONS

• Circuitry - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 1.9 W power consumption single or double face
- Emergency DC wattages as follows:
6 V DC = 1.3 W 12 V DC = 1.7 W 24 V DC = 3.5 W

• Circuitry - SELF-POWERED

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4W power consumption single or double face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration (standard)
- Solid state transfer and battery charger

• Mechanical

- 20 Gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colors optional

• Compliances

- CSA Certified to C22.2 #141.15, C860



quick
ship




Energy-Verified
Energie-Vérfiée

ORDERING GUIDE

| Series | Approval | Nbr of faces | Color | DC voltage* | Options† |
|--------------------------------|--------------------|--|--|--|----------------------|
| SLEXS - Exit SLSRS - Sortie | C - C860 Certified | 0 - Universal faces 1 - Single face 2 - Double faces | WH - White BK - Black GY - Grey SP - Custom color (specify) | UDC - 6, 12, 24V universal DC IB - Self powered for 90 min. | TP, WG**, PG, OP, K5 |

† For detailed options descriptions, please consult the options page.
 * If AC only is required, select the UDC option and do not connect the DC wires when installing.
 ** Specify mounting.
QUICK SHIP: Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide.
 Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

DIMENSIONS

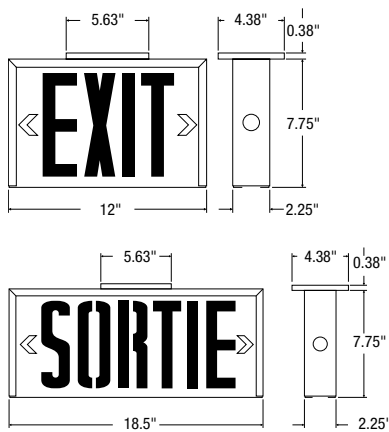

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.