

SLG-5L

PLASTIC COMPACT BATTERY UNIT

(Over 90 minutes Duration Standalone Unit)
2 x 5 W Crisp White LED Heads

The commercial SLG-5L features a plastic battery unit designed to provide an economical and versatile solution to emergency lighting needs within a small and compact design. The SLG-5L series is configured with two 5 W LED heads and can run for 90 minutes duration as a standalone unit.

FEATURES AND SPECIFICATIONS

• Circuitry

- 120/347V AC 60Hz Input, field selectable
- Solid state variable rate charger
- Over 90 minutes Duration Standalone Unit
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE status
- Fully automatic, current limited charger
- Short circuit protection
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

• Mechanical

- High impact, UV stabilized, thermoplastic construction
 - 2 x 5 W Crisp White LED Heads
 - Low profile, canopy type design with extremely small total footprint
 - Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
 - Unit "quick snaps" onto backplate for simple, speedy installation
 - White color is standard
- Note: Not intended for flush ceiling mount.

• Approval

- CSA Certified to C22.2 #141-15

• Compliance

- Meets requirements of ICES-005



OVERVIEW

Light source	LED
Input voltage (V AC)	120 / 347
Emergency duration	Over 90 minutes



ICES
005



TECHNICAL SPECIFICATION TABLE

Part number	Volts (V DC)	Watts (W)	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (V AC)	Color
SLG-5L	6	N/A	2	N	5	LED	120/347	White

ORDERING GUIDE


SLG-5L
Series
SLG-5L

WIREGUARD²

Part number	Dimensions (in)
WGD630-V2	15.25 x 12.25 x 9.00

² Please contact your Stanpro customer service representative for more information.

DIMENSIONS

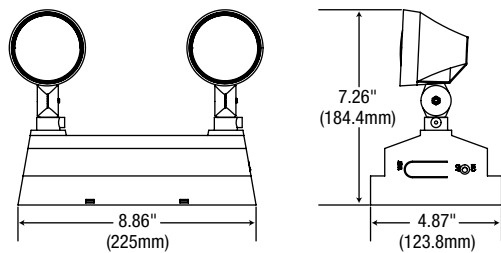

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.