

Series Spec Sheet

SPSRS-2L/SPSRS12-2L

“EASY OUT” SORTIE STEEL COMBO

SPSRS-2L

6 VDC 36 W Battery Capacity (Over 4 hours Duration Standalone Unit)
2 x 2 W Crisp White LED Heads

SPSRS12-2L

12 VDC 72 W Battery Capacity (Over 8 hours Duration Standalone Unit)
2 x 2.5 W Crisp White LED Heads

The commercial SPSRS-2L/SPSRS12-2L features a slim profile that prevents light leaks. Easy to install design, available in 6 VDC 36 W with over 4 hours duration and 12 VDC 72 W with over 8 hours duration.

FEATURES AND SPECIFICATIONS

• Circuitry

- LED ultra bright light source
- 120/347 VAC 60 Hz input, field selectable
- 1.9 W power consumption for LED exit portion of combination sign
- LED Emergency DC wattages as follows:
6 VDC = 1.3 W; 12 VDC = 2.6 W
- 6 VDC 36 W or 12 VDC 72 W emergency power output versions (as specified)
- Momentary push button test switch
- Diagnostic/pilot LED for AC ON and CHARGE
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, sealed lead acid battery

• Mechanical

- 20 Gauge steel construction
- Slide out faceplates and backplates for rapid and simple installation
- Universal spider knockout pattern stamped into backplate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit c/w spider plate
- Front head mounting is standard
- Multiple conduit entry knockouts
- White powder coat finish standard
- PAR18 small style, high impact thermoplastic heads
- LED heads with limited lifetime warranty*

• Compliances

- CSA Certified to C22.2 #141.15, C860



quick
ship



Energy Verified
Energie Vérifiée

* For complete warranty details, please see our terms and conditions in our website.

ORDERING GUIDE


Series
SPSRS-2L - (Sortie) C860 certified
SPSRS12-2L

QUICK SHIP: Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

MODEL RATING

Model	Voltage	Wattage capacities		
		30 min.	60 min.	90 min.
SPSRS-2L	6V	36	18	12
SPSRS12-2L	12V	72	36	24

DIMENSIONS

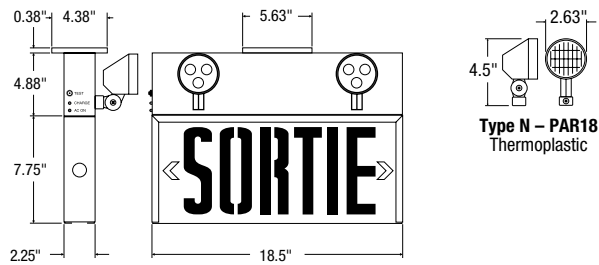

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.