

## Series Spec Sheet

# RMSE

## STEEL RUNNING MAN SIGN

The RMSE series is an entry-level steel commercial sign available in AC/DC and internally self-powered versions.

### FEATURES AND SPECIFICATIONS

#### • Circuitry - AC

##### Physical Characteristics

- 120-347 VAC Input
- Emergency DC wattages as follows:  
6 VDC = 1 W, 12 VDC = 1 W, 24 VDC = 1 W

#### • Circuitry - Self-powered

- 120-347 VAC Input
- Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger

#### • Mechanical

- 20 gauge steel housing
- Universal faces
- Universal mounting :  
ceiling mount, wall mount, end mount
- White powder coat finish

#### • Approvals

- CSA CERTIFIED TO C22.2 #141-15

#### • Compliance

- Meets requirements of ICES-005



### OVERVIEW

Light source	LED
Input voltage (VAC)	120-347
Input power	1.9 W & AC/DC (single or double face) 2W self-powered (single or double face)
DC voltage (VDC)	6, 12, 24
DC power (W)	0.9

### POWER CONSUMPTION TABLE

Model	Voltage	Power	Current
RMSE-IB1	120 V	2 W	0.044 A
	277 V	2 W	0.044 A
	347 V	2 W	0.044 A
RMSE-UDC	120 V	2 W	0.08 A
	277 V	2 W	0.08 A
	347 V	2 W	0.08 A



**quick  
ship**



**LED  
fixture**



**ICES  
005**



**QUICK SHIP AND TECHNICAL SPECIFICATION TABLE**

Part Number	DC Volts (VDC)	Nbr of faces	Light source	Input Volts	Color
RMSE-IB1	IB	Universal	LED	120-347	White
RMSE-UDC	UDC	Universal	LED	120-347	White

QUICK SHIP: Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

**ACCESSORIES (order separately)**


Part number	Type
FIBER-RMSE	Running man fiber no arrow

**WIREGUARD<sup>1</sup>**

	Part number	Dimensions
Wall mount	WGD520	14" x 10" x 4.75"
Ceiling mount	WGD540	14.5" x 6.25" x 10.5"
End Mount	WGD650	13.75" x 12.25" x 16.5"

<sup>1</sup> Please contact your Stanpro customer service representative for more information.

**DIMENSIONS**

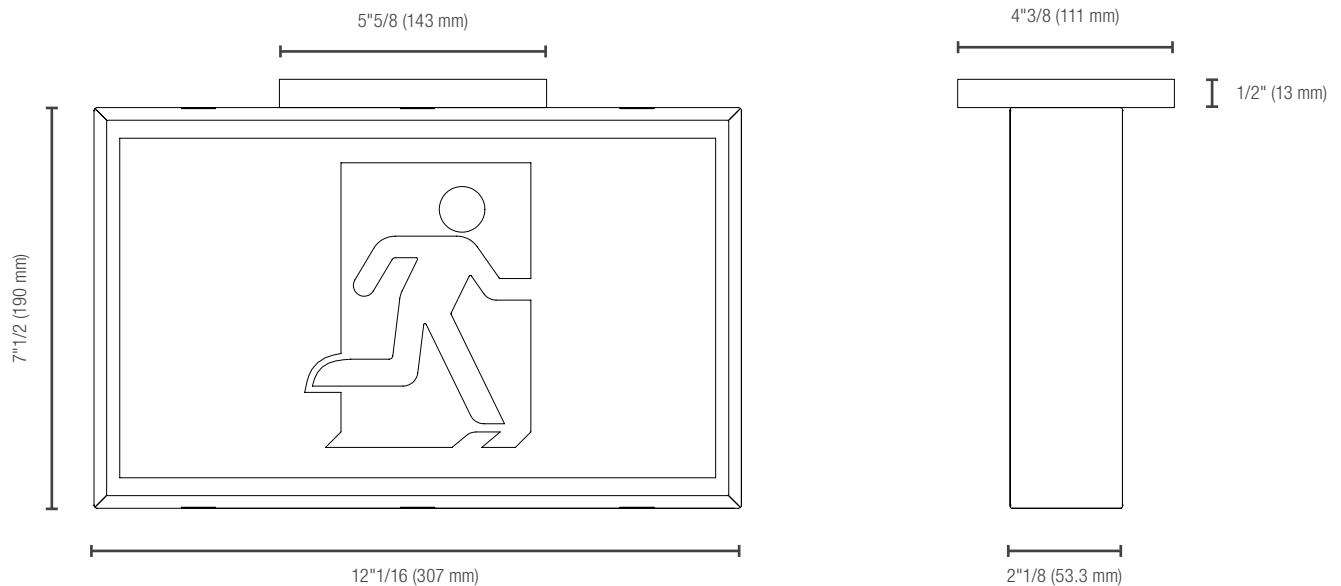

**CONFIGURATIONS**



Comes standard with three pictogram legends for direction selection.



For double face no arrow options, please order the RMSE along with the following fiber: FIBER-RMSE

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.