

## Series Spec Sheet

# SWN

## “NOAH” WET LOCATION ANTI VANDAL REMOTE

Single or double

6V, 12V & 24V lamps in LED & Quartz

The SWN series of wet location anti vandal remotes is designed to perform in extreme environments. The single or double lamp assemblies are completely protected from the elements within a fully gasketed polycarbonate housing. Available in 6 V, 12 V or 24 V models, utilizing quartz halogen or LED (bi-pin based) lamps.

### FEATURES AND SPECIFICATIONS

- **Electrical and circuitry**

- 6 VDC, 12 VDC or 24 VDC
- Quartz halogen lamps - bi-pin based
- LED lamps - bi-pin based

- **Mechanical**

- Polycarbonate enclosure is fully gasketed around lens and canopy to prevent water infiltration
- Stainless steel tamper proof screws and bits
- Wet location
- Lamps are fully adjustable
- Fully gasketed housing
- Available in white and black
- Universal spider knockout pattern stamped into backplate for junction box mounting

- **Ambient Temperature**

- -35°C to +40°C

- **Approvals**

- CSA Certified to C22.2 #141-15
- CSA Certified type 2, 3, 3R, 4, 4X, 5, 12 or 12K
- CSA Certified to NSF 2
- IP66

- **Compliance**

- Meets requirements of ICES-005



### OVERVIEW

Light source	LED or Quartz halogen
Input voltage (VDC)	6, 12, 24

For complete warranty details, please see our terms and conditions on our website.



## TYPICAL SPECIFICATION



## TYPICAL SPECIFICATION

Remote head shall be completely protected from the elements within a fully gasketed polycarbonate housing, be fully adjustable both tilt and swivel and have a universal spider knockout pattern stamped into back plate for junction box mounting. The SWN shall be 0 V, 0 W, 0 lumens. The MR16 LED's lamps shall be fully integrated in the molded shell to ensure extended life and maximum performance. The remote fixtures shall be certified to CSA 22.2 No.141-15, CSA Certified type 2, 3, 3R, 4, 4X, 5, 12, CSA Certified to NSF 2 and be ICES005 compliant. The remote unit shall be Stanpro model: SWN \_\_\_\_\_

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

**ORDERING GUIDE - LED**

Series	Nbr of heads	Volts (VDC operational)	Watts (W)	Lamp type	Color
SWN	1 - Single head	06-24V - 6 to 24	4W - 4	LR - LED	BK - Black
			5W - 5	LA - LED	WH - White
	2 - Double head	12-24V - 12 to 24	6W - 6	LA - LED	
			7W - 7		

**ORDERING GUIDE - INCANDESCENT**

Series	Nbr of heads	Volts (VDC)	Lamp type	Color
SWN	1 - Single head	06 - 6	See lamp selection chart	BK - Black
	2 - Double head	24 - 24		WH - White



**INCANDESCENT LAMP SELECTION**

	6 V	24 V
Quartz halogen	10WQ	12WQ

**LEXAN GUARD**

	Part number	Dimensions (in)
Wall Mount	PGD104	14 x 7.25 x 7.5

**DIMENSIONS**

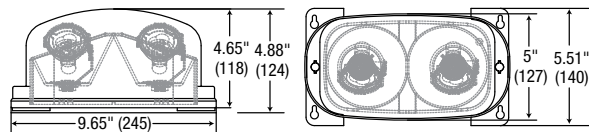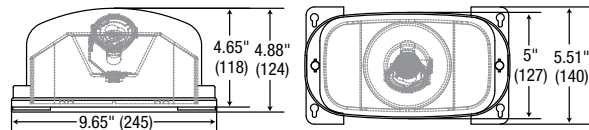

**LUMEN TABLE**

Watts	Lumens
4W LR	388
5W LA	435
6W LA	507
7W LA	652

**SPACING GUIDE**

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.