


Reflector



Order code	Description	Watts (W)	Base	Color temp. (K)	Lumen output (lm)	Average life (hrs)	CRI	Hal/Incan equivalent (W)	Case qty (inner/master)
PAR20									
14100 ¹	CF9/27K/PAR20/E26/STD	9	E26	2 700	300	8 000	82	50	6/48
14102 ¹	CF9/35K/PAR20/E26/STD	9	E26	3 500	300	8 000	82	50	6/48
R20									
14162	CF11/27K/R20/E26/STD	11	E26	2 700	350	8 000	82	50	6/48

Cold Cathode

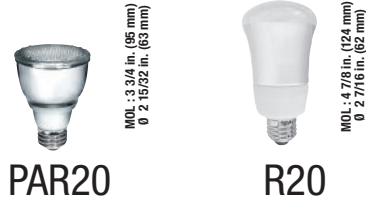

Order code	Description	Watts (W)	Base	Color temp. (K)	Lumen output (lm)	Average life (hrs)	Color	CRI	Incandescent equivalent (W)	Case qty (inner/master)
A19										
58427	CCFL8/F/A19/25M/E26/STD	8	E26	2 700	320	25 000	Frost	82	35-40	1/48



¹Suitable for outdoor use(base upwards)

