

VT4F3

VAPOUR TIGHT FLUORESCENT

3 lamps

The Stanpro VT4F3 sealed 4 foot linear fluorescent luminaire is ideal for a variety of industrial, commercial applications. It can be installed inside or outside.

FEATURES AND SPECIFICATIONS

• Construction

Housing

- The housing is sealed with a uniform gasket that blocks the ingress of moisture and dust and reinforced snap clips lock the luminaire together
- Polycarbonate construction makes the luminaire lightweight, flexible and highly impact resistant
- The UV stabilized polycarbonate housing and lens are impervious to rust or rot and are unaffected by extreme temperatures

Ballast

Our fixtures come standard with electronic instant start ballasts (not intended for use with occupancy sensors).

Reflector

The VT4F3 specular reflector provides superior light distribution for maximum light output.

Mounting

The housing is moulded with a recessed conduit knockout at either end along with row mounting, end aligners. A sealed, plastic cable gland and stainless steel mounting hardware are included with each luminaire. The VT4F3 can be surface wall, ceiling mounted or suspended with supplied clips.

• Compliances

- Suitable for wet and damp locations
- IP65
- CSA certified
- Flame spread rating FSR85
- Smoke classification SDC430



OVERVIEW

Light source	Fluorescent
Watts (W)	32
Lamp type	T8



wet
location



fluorescent
fixture




ORDERING GUIDE

VT4F3	T8	032	A
Series	Lamp type	Watts (W)	Volts (V)
VT4F3	T8	032 - 32	A - 120

Configuration not recommended in ambient temperature exceeding 25°C.

DIMENSIONS

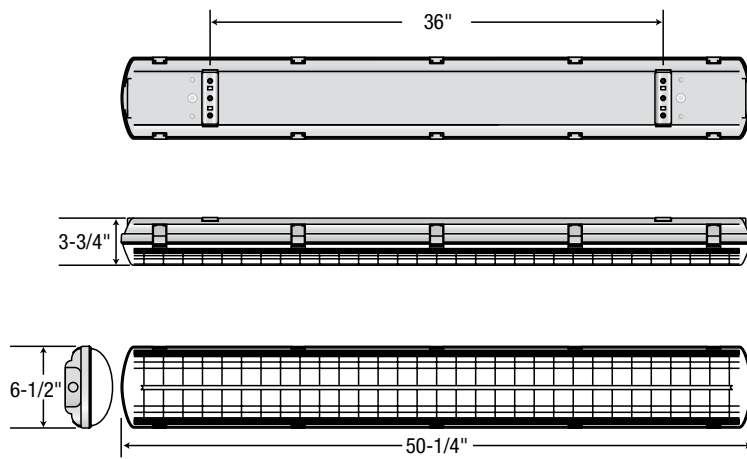

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.