

ALK-L

AREA LIGHT

5
yr
warranty

LED
fixture

IP
65

dimnable
fixture

IK08

wet
location

OVERVIEW

- 75 W - 230 W
- 11 607 lm - 37 720 lm
- 165 lm/W - 170 lm/W
- Type III, IV and V distributions
- 3 000 K - 4 000 K - 5 000 K
- All configurations come standard with a 3 pin receptacle and shorting cap.

MOUNTING OPTIONS

PA6 - 6" square pole arm

PA6R - 6" round pole arm

A - Slipfitter

TR - Yoke mount

AR - Adjustable arm for square pole

OPTIONS

PR7 - 7 pin photocell receptacle only

KV¹ - 10 kV surge protection

OSI-PB-1001² - Occupancy sensor


¹ Apply only for 347 V as it's come standard in 120-277 V.

² Please consult the occupancy sensor section for the specifications.



EASY LIGHT DISTRIBUTION

Simply rotate the lens to easily light up the desired places

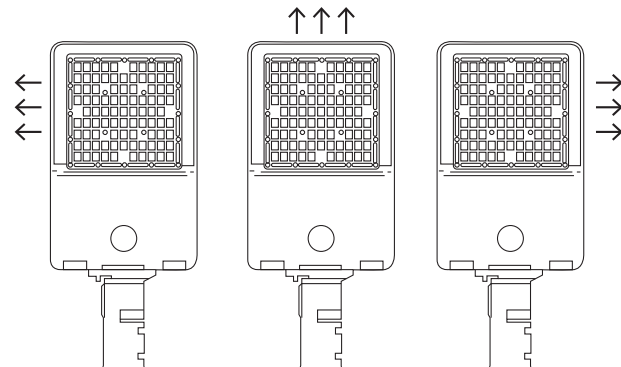

STANPRO

www.standardpro.com