



# DECORATIVE AND ACCENT QUICK SHIP





# CONTENTS

**4 DECORATIVE PENDANT**

**8 LED WALL SCONCE**

Traditional / Linear / Contemporary

**16 LED LINEAR ARCHITECTURAL**

Kolika / Edge

**24 LED ACCENT & UNDERCABINET LIGHTING**

LED Swivel / Fluo LED / Line Voltage Puck Light /  
Low Voltage Puck Light / DUOLED

**35 LED TAPE AND EXTRUSION**

Low Voltage LED Tape / Extrusion and Lens / LED Driver / LED Tape Kit / 120 V LED Tape



# Decorative Pendant

Stanpro now offers a complete line of Decorative Pendants, available in a selection of seven finishes and two different lampholder styles. Reflectors, glass shades and cages are also available to create a customizable look. Offered with a 10 feet cord, these pendants are suitable for both commercial and residential applications. Whether your decor is traditional, industrial, modern or rustic, you'll find a solution that will suit your style.

Consult Stanpro's LED lamps catalogue to choose among a wide variety of LED filament lamps which will add the final touch to your luminaire.




Series 100  
Modern Style




Series 110  
Industrial Style

Order code	Description	Volts (VAC)	Maximum Watts per socket (W)	Socket	Canopy and socket finish	Cord Color	Cord Length (ft)	Wire Gauge	Case qty (master)
<b>Series 100 - Modern Style</b>									
67266	PND/100/HW/BN-BK-BN/STD	120	60	E26	Brushed Nickel	Black	10	18 AWG/2C	27
67267	PND/100/HW/CH-SLV-CH/STD	120	60	E26	Chrome	Silver	10	18 AWG/2C	27
67270	PND/100/HW/ANT.GLD-BK-ANT.GLD/STD	120	60	E26	Antique Gold	Black	10	18 AWG/2C	27
<b>Series 110 - Industrial Style</b>									
67272	PND/110/HW/BN-BK-BN/STD	120	60	E26	Brushed Nickel	Black	10	18 AWG/2C	27
67273	PND/110/HW/CH-SLV-CH/STD	120	60	E26	Chrome	Silver	10	18 AWG/2C	27
67276	PND/110/HW/ANT.GLD-BK-ANT.GLD/ STD	120	60	E26	Antique Gold	Black	10	18 AWG/2C	27

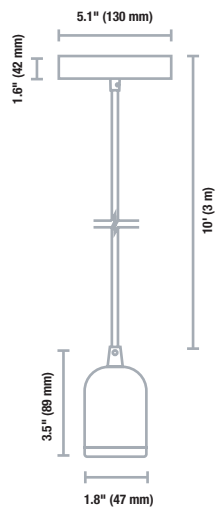

Series 100

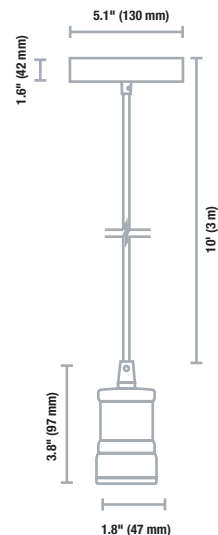

Series 110



Series 200



Series 210



Series 300



Series 310



Series 320



Decorative Ring



Series 330 (10" & 14")



Series 340 (10" & 14")




Series 400 (10" & 14")


Accessory	Order code	Description	Finish	Diameter (in)	Case qty (master)
<b>Metal cages</b>	<b>Series 200 - Industrial Style Cages</b>				
	67278	PND/LHC/200/BK/STD	Black	5.5	27
	<b>Series 210 - Industrial Style Cages</b>				
	67279	PND/LHC/210/BK/STD	Black	5.3	27
<b>Glass shades<sup>1</sup></b>	<b>Series 300</b>				
	67280	PND/LS/300/GLS/7.5IN/CLR/STD	Clear	7.4	8
	<b>Series 310</b>				
	67281	PND/LS/310/GLS/7IN/CLR/STD	Clear	7	8
	<b>Series 320</b>				
	67282	PND/LS/320/GLS/5.5IN/CLR/STD	Clear	5.5	18
<b>Decorative rings<sup>2</sup></b>	67293	PND/RING/WH/STD	White	-	40
	67294	PND/RING/BN/STD	Brushed Nickel	-	40
	67295	PND/RING/CH/STD	Chrome	-	40
	67297	PND/RING/ANT.GLD/STD	Antique Gold	-	40
	67298	PND/RING/BK.CH/STD	Black Chrome	-	40
	67299	PND/RING/BZ/STD	Oil Rubbed Bronze	-	40
<b>Metal reflectors</b>	<b>Series 330 - Modern Style</b>				
	67283	PND/LS/330/STL/10IN/BK/STD	Black	10	12
	67284	PND/LS/330/STL/10IN/WH/STD	White	10	12
	67285	PND/LS/330/STL/14IN/BK/STD	Black	14	6
	67286	PND/LS/330/STL/14IN/WH/STD	White	14	6
	<b>Series 340 - Industrial Style</b>				
	67287	PND/LS/340/STL/10IN/BK/STD	Black	10	16
	67288	PND/LS/340/STL/10IN/WH/STD	White	10	16
	67289	PND/LS/340/STL/14IN/BK/STD	Black	14	8
	67290	PND/LS/340/STL/14IN/WH/STD	White	14	8
	<b>Series 400 - Industrial Style Half-Cages</b>				
	67291	PND/LSC/400/10IN/BK/STD	Black	10	16
	67292	PND/LSC/400/14IN/BK/STD	Black	14	8

<sup>1</sup> A black decorative ring is included with each glass shade. Other finishes available. Order separately.  
<sup>2</sup> Decorative rings only compatible with Series 300, 310 & 320.







Industrial Cage Series  
200




Industrial Cage Series  
210




Glass Shade Series  
300




Glass Shade Series  
310




Glass Shade Series  
320

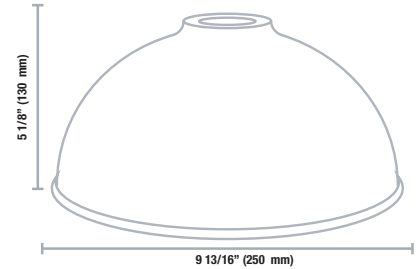


Reflector 10" Series  
330

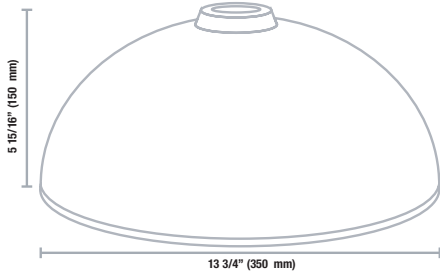


Reflector 14" Series  
330

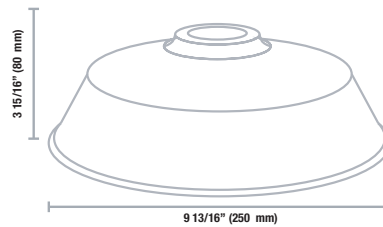


Reflector 10" Series  
340

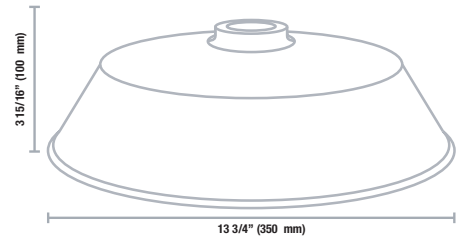


Reflector 14" Series  
340

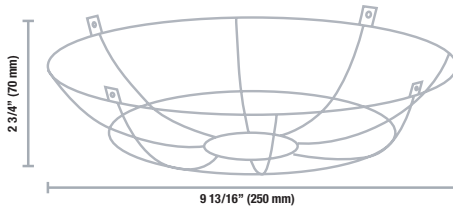

Half-Cage 11" Series  
400

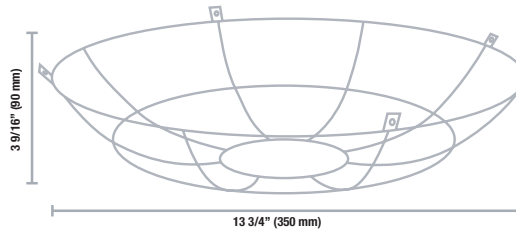

Half-Cage 14" Series  
400



Decorative Ring



# LED Wall Sconce - Traditional

Our LED Wall Sconces adapt to a variety of applications, as they are available in several different sizes and color temperatures of 3 000 K and 4 000 K. These luminaires operate on line voltage and provide a diffused direct lighting, as well as a 120° angled upward and downward lighting.

These Wall Sconce Luminaires come equipped with double-sided frosted lenses and depending on the desired look, they can be installed with a glossy or matte lens finish.







Order code	Description	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Housing Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
<b>Single</b>																
65838	SVAN/SINGLE/10W/30K/BN/F/STD	Yes	10	120	3 000	628	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65839	SVAN/SINGLE/10W/40K/BN/F/STD	Yes	10	120	4 000	669	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
<b>Double</b>																
65840	SVAN/DOUBLE/20W/30K/BN/F/STD	Yes	20	120	3 000	1 266	63	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
65841	SVAN/DOUBLE/20W/40K/BN/F/STD	Yes	20	120	4 000	1 344	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	12
<b>Triple</b>																
65842	SVAN/TRIPLE/30W/30K/BN/F/STD	Yes	30	120	3 000	1 917	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65843	SVAN/TRIPLE/30W/40K/BN/F/STD	Yes	30	120	4 000	2 023	67	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
<b>Quadruple</b>																
65844	SVAN/QUAD/40W/30K/BN/F/STD	Yes	40	120	3 000	2 579	64	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6
65845	SVAN/QUAD/40W/40K/BN/F/STD	Yes	40	120	4 000	2 422	61	90	50 000	Brushed nickel	Frosted	120	Yes	>0.9	<30	6

## ACCESSORY


Order code	Description	Type	Finish / color	Compatible with	Case qty (inner/master)
65959	SVAN/LENS/F/STD	Lens for modular vanity and wall sconce	Frosted	65838, 65839, 65840, 65841, 65842, 65843, 65844, 65845	10/200




Single



Double

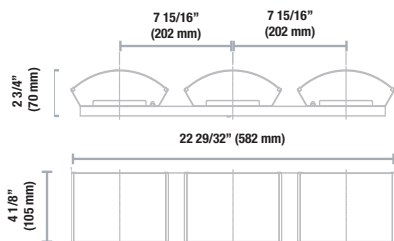

Triple

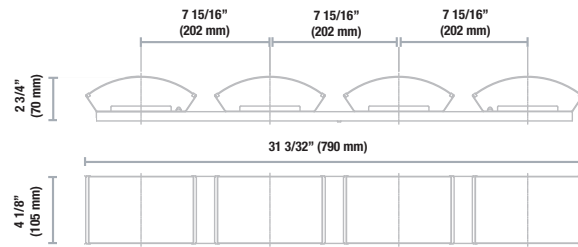

Quadruple


Lumen values are derived from photometric testing  
For a complete list of compatible dimmers and ENERGY STAR qualified products, please visit [www.standardpro.com](http://www.standardpro.com)






# LED Wall Sconce - Linear

Our series of linear LED Wall Sconces, equipped with frosted lenses, provide high quality lighting with a CRI 90+ while adding a decorative touch to the application. Adding an LED Wall Sconce adds a decorative element to match the look of a room; its modern design and smooth lighting can be integrated in a wide variety of decors. These linear LED wall sconces emit a soft white light and are offered in 3 different finishes. They are the perfect solution to everyday needs.

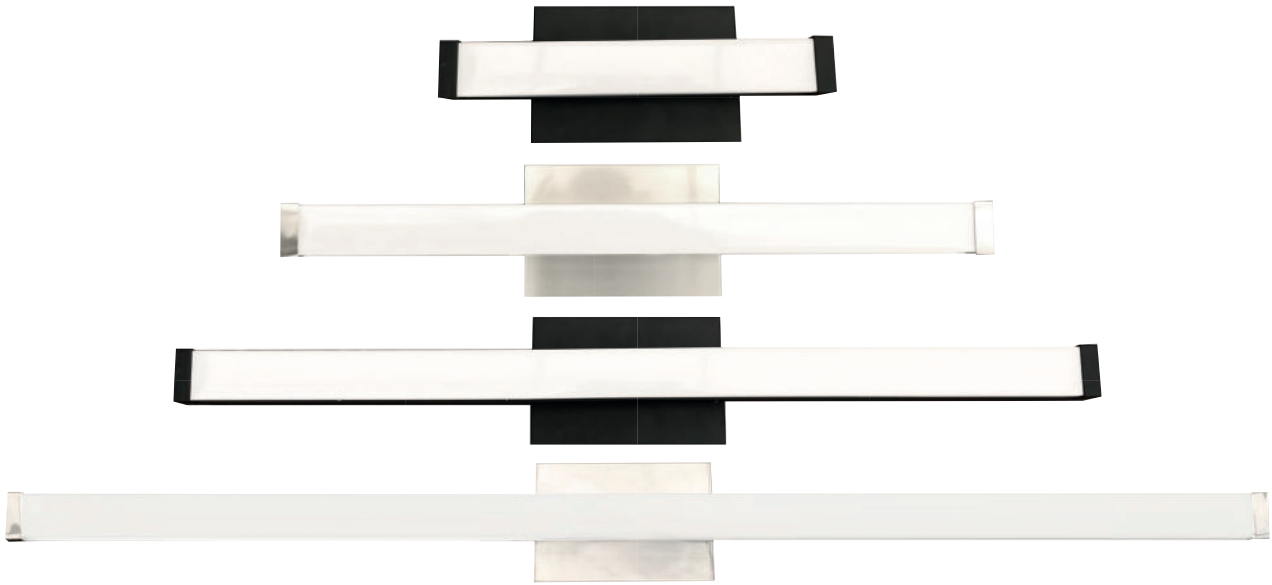

Order code	Description	ES (Yes/No)	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen output (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Lens Finish	Beam angle (°)	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
<b>12"</b>																
67342	SVAN/5W/12IN/30K/CH/F/STD	No	5	120	3 000	443	89	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67343	SVAN/5W/12IN/30K/BN/F/STD	No	5	120	3 000	439	88	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67344	SVAN/5W/12IN/30K/BK/F/STD	No	5	120	3 000	421	84	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
67345	SVAN/5W/12IN/40K/BN/F/STD	No	5	120	4 000	449	90	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
<b>24"</b>																
67346	SVAN/10W/24IN/30K/CH/F/STD	No	10	120	3 000	879	88	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67347	SVAN/10W/24IN/30K/BN/F/STD	No	10	120	3 000	889	89	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67348	SVAN/10W/24IN/30K/BK/F/STD	No	10	120	3 000	845	85	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
<b>36"</b>																
67349	SVAN/15W/36IN/30K/CH/F/STD	No	15	120	3 000	1 221	81	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10
67350	SVAN/15W/36IN/30K/BN/F/STD	No	15	120	3 000	1 219	81	90	50 000	Brushed Nickel	Frosted	120	Yes	>0.9	<15	10
67351	SVAN/15W/36IN/30K/BK/F/STD	No	15	120	3 000	1 160	77	90	50 000	Black	Frosted	120	Yes	>0.9	<15	10
<b>48"</b>																
67352	SVAN/20W/48IN/30K/CH/F/STD	No	20	120	3 000	1 470	74	90	50 000	Chrome	Frosted	120	Yes	>0.9	<15	10

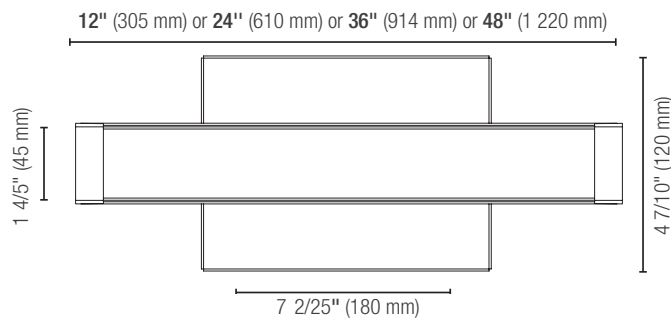

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)



dimmable  
fixture



ICES  
005



damp  
location



5  
yrs  
warranty



ETL  
US  
Intertek



FCC



# LED Wall Sconce - Contemporary




Our Contemporary LED Wall Sconce Luminaire series is available in 3 sizes and offers the advantage of an integrated 3 color temperature selection.

With a contemporary design in either chrome, black or brushed nickel finish, our wall sconce luminaires are ideal to add a modern touch to any residential or commercial space.

# Square



Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2,3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>1</sup>	Beam angle (°)	Shape	Finish	Dimming (Yes/No)	Power factor	Master case qty
<b>3 CCT Selectable</b>														
<b>14"</b>														
69021	SVANCO14-S15W-A-3CBK	15	120	3 000/3 500/4 000	886	59	90+	50 000	170	Square	Black	Yes	≥0.90	4
69024	SVANCO14-S15W-A-3CCH	15	120	3 000/3 500/4 000	1 074	72	90+	50 000	170	Square	Chrome	Yes	≥0.90	4
69033	SVANCO14-S15W-A-3CBN	15	120	3 000/3 500/4 000	1 030	68	90+	50 000	170	Square	Brushed Nickel	Yes	≥0.90	4
<b>24"</b>														
69022	SVANCO24-S20W-A-3CBK	20	120	3 000/3 500/4 000	1 221	61	90+	50 000	160	Square	Black	Yes	≥0.90	4
69025	SVANCO24-S20W-A-3CCH	20	120	3 000/3 500/4 000	1 408	70	90+	50 000	160	Square	Chrome	Yes	≥0.90	4
69034	SVANCO24-S20W-A-3CBN	20	120	3 000/3 500/4 000	1 350	68	90+	50 000	160	Square	Brushed Nickel	Yes	≥0.90	4
<b>38"</b>														
69023	SVANCO38-S28W-A-3CBK	28	120	3 000/3 500/4 000	1 880	67	90+	50 000	160	Square	Black	Yes	≥0.90	4
69026	SVANCO38-S28W-A-3CCH	28	120	3 000/3 500/4 000	2 197	78	90+	50 000	160	Square	Chrome	Yes	≥0.90	4
69035	SVANCO38-S28W-A-3CBN	28	120	3 000/3 500/4 000	2 197	78	90+	50 000	160	Square	Brushed Nickel	Yes	≥0.90	4

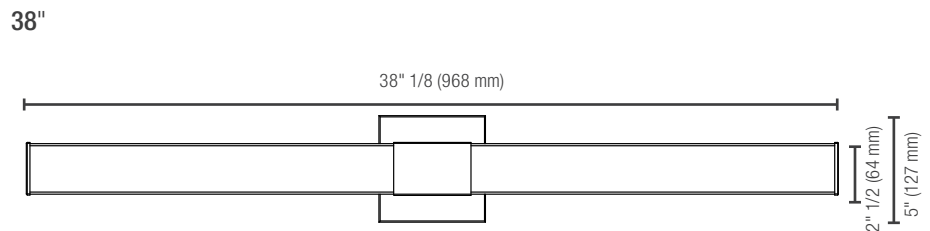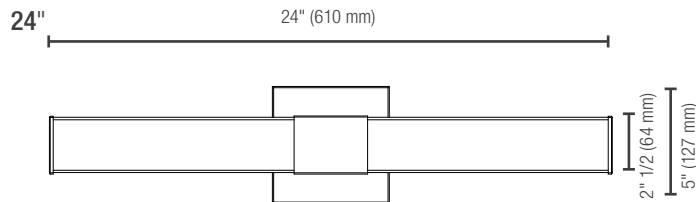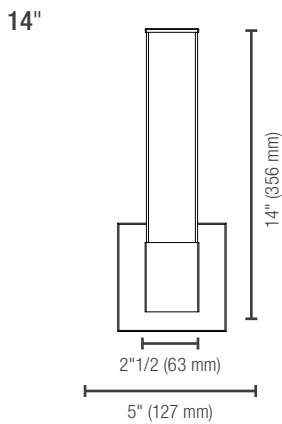

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)




# Round




Order code	Model number	Watts (W)	Volts (VAC)	Color temp. (K) <sup>1</sup>	Lumen output (lm) <sup>2,3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Beam angle (°)	Shape	Finish	Dimming (Yes/No)	Power factor	Master case qty
<b>3 CCT Selectable</b>														
<b>14"</b>														
69027	SVANCO14-R15W-A-3CBK	15	120	3 000/3 500/4 000	886	59	90+	50 000	170	Round	Black	Yes	≥0.90	4
69030	SVANCO14-R15W-A-3CCH	15	120	3 000/3 500/4 000	1 074	72	90+	50 000	170	Round	Chrome	Yes	≥0.90	4
69036	SVANCO14-R15W-A-3CBN	15	120	3 000/3 500/4 000	1 030	68	90+	50 000	170	Round	Brushed Nickel	Yes	≥0.90	4
<b>24"</b>														
69028	SVANCO24-R20W-A-3CBK	20	120	3 000/3 500/4 000	1 221	61	90+	50 000	160	Round	Black	Yes	≥0.90	4
69031	SVANCO24-R20W-A-3CCH	20	120	3 000/3 500/4 000	1 408	70	90+	50 000	160	Round	Chrome	Yes	≥0.90	4
69037	SVANCO24-R20W-A-3CBN	20	120	3 000/3 500/4 000	1 350	68	90+	50 000	160	Round	Brushed Nickel	Yes	≥0.90	4
<b>38"</b>														
69029	SVANCO38-R28W-A-3CBK	28	120	3 000/3 500/4 000	1 880	67	90+	50 000	160	Round	Black	Yes	≥0.90	4
69032	SVANCO38-R28W-A-3CCH	28	120	3 000/3 500/4 000	2 197	78	90+	50 000	160	Round	Chrome	Yes	≥0.90	4
69038	SVANCO38-R28W-A-3CBN	28	120	3 000/3 500/4 000	2 197	78	90+	50 000	160	Round	Brushed Nickel	Yes	≥0.90	4


14"

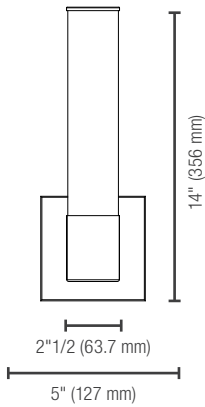

24"

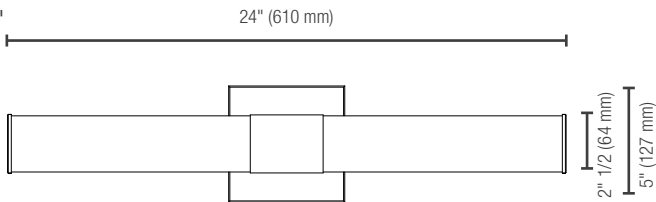

38"

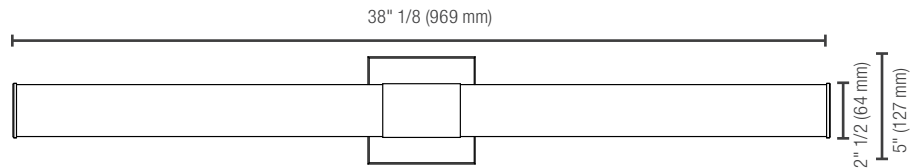

<sup>1</sup>Lumen values are derived from photometric testing  
<sup>2</sup>For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)











# LED Architectural Luminaires

# KOLIKA - L1KCL Gen.2

## Suspended LED Linear

### 3 CCT Selectable

The KOLIKA luminaires offer a sleek and lightweight design, making it the perfect choice for creating a modern atmosphere in any office, commercial or retail space.

These 4' and 8' luminaires are available in a black or white matte finish and features the versatility to change the color temperature using a simple switch located inside the luminaire.

The KOLIKA GEN2 series also includes a stylish up and down light option, which provides a lovely indirect diffused light with more light directed downward to light up the desired space efficiently.




Order code	Model number	Watts (W)	Volts (VAC)	Colour temp. (K)	Lumen (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Power factor	THD (%)	Case qty (master)
<b>4'</b>												
<b>Direct</b>												
68575	L1KCL-G2-4LS1-3C-WH	25	120-277	3 000/3 500/4 000	3 026	121	80+	54 000	White	>0.9	<15	6
68576	L1KCL-G2-4LS2-3C-WH	40	120-277	3 000/3 500/4 000	4 844	121	80+	54 000	White	>0.9	<15	6
68577	L1KCL-G2-4LS2-3C-BK	40	120-277	3 000/3 500/4 000	4 844	121	80+	54 000	Black	>0.9	<15	6
<b>Direct/Indirect</b>												
68578	L1KCL-G2-4LS2U-3C-WH	40	120-277	3 000/3 500/4 000	5 000 <sup>5</sup>	125	80+	54 000	White	>0.9	<15	6
68579	L1KCL-G2-4LS2U-3C-BK	40	120-277	3 000/3 500/4 000	4 800 <sup>5</sup>	120	80+	54 000	Black	>0.9	<15	6
<b>8'</b>												
<b>Direct</b>												
68580	L1KCL-G2-8LS1-3C-WH	80	120-277	3 000/3 500/4 000	9 760	122	80+	54 000	White	>0.9	<15	4
68581	L1KCL-G2-8LS1-3C-BK	80	120-277	3 000/3 500/4 000	9 760	122	80+	54 000	Black	>0.9	<15	4
<b>Direct/Indirect</b>												
68582	L1KCL-G2-8LS1U-3C-WH	80	120-277	3 000/3 500/4 000	10 000 <sup>5</sup>	125	80+	54 000	White	>0.9	<15	4
68583	L1KCL-G2-8LS1U-3C-BK	80	120-277	3 000/3 500/4 000	9 600 <sup>5</sup>	120	80+	54 000	Black	>0.9	<15	4

## ACCESSORY

Order code	Model number	Type
68584	KIT-CK2	Joiner kit for row mounting
69097	KIT-CANOPY-WH	Canopy Kit with suspension cable
69098	KIT-CANOPY-WH	Canopy Kit with suspension cable

\* Please ensure to order a new kit for every fixture added.

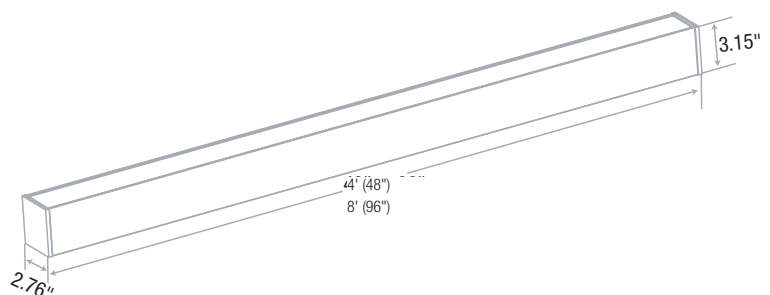

6

damp location








# KOLIKA - L1KCL

## Suspended LED Linear

Our Kolika Quick Ship LED offers an energy-efficient, low maintenance luminaire that accommodates most design applications. The light weight and easy to install L1KCL is designed to offer maximum energy savings, substantially reduced maintenance costs and superior quality.

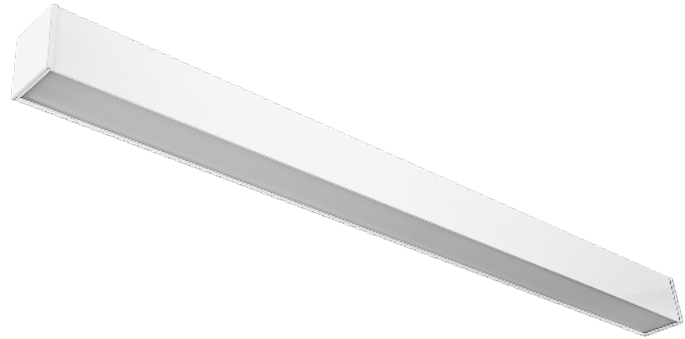


Model number	DLC unique ID	Watts (W)	Volts (VAC)	Color temp. (K)	Lumen (lm) <sup>3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs)	Finish	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
<b>4"</b>													
L1KCL-4LS1/35K	-	23	120-277	3 500	2 500	109	80+	50 000	White	Yes	>0.9	<20	6
L1KCL-4LS1/40K	-	23	120-277	4 000	2 500	109	80+	50 000	White	Yes	>0.9	<20	6
L1KCL-4LS2/40K	PLHORJWP3H7Q	42	120-277	4 000	5 000	120	80+	50 000	White	Yes	>0.9	<20	6
<b>8"</b>													
L1KCL-8LS1/35K	PLUSL93ZBW72	85	120-277	3 500	9 900	116	80+	50 000	White	Yes	>0.9	<20	4

### ACCESSORY

Description	Type
<b>KIT-GEN-CK</b>	Joiner kit for row mounting <sup>1</sup>

<sup>1</sup> Please ensure to order a new kit for every fixture added.

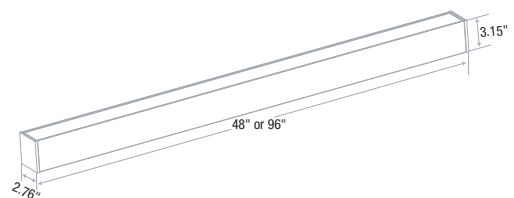




# T-GRID LED LINEAR LIGHT

The L3CTG is available in 2' and 4' which can be compatible to 15/16" standard suspended ceilings system. This product offers lighting designers more freedom to design since the LED module can follow the ceiling elements in many different ways. It is suitable for commercial and architectural environments that require a unique and elegant lighting design.




Order code	Model number	DLC unique ID	Width (in)	Watts (W)	Color temp. (K) <sup>2</sup>	Lumen (lm) <sup>2</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Cable rating	Lens finish	Dimming (Yes/No)	Power factor	THD (%)	Case qty (master)
<b>2"</b>															
68025	L3CTG-0215LS1/35K	PL5RUZGG1HAH	15/16	10	3 500	1 260	126	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68026	L3CTG-0215LS1/40K	PLA2M5KQG1TF	15/16	10	4 000	1 320	132	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
<b>4"</b>															
68027	L3CTG-0415LS2/35K	PLBJ29RKP4E	15/16	20	3 500	2 540	127	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18
68028	L3CTG-0415LS2/40K	PLERYM5Z9ZTU	15/16	20	4 000	2 670	133	80+	50 000	FT6	Frosted	Yes	>0.9	<20	18

## L3CTG-02

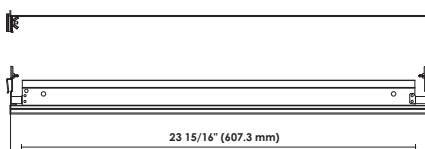

## L3CTG-04

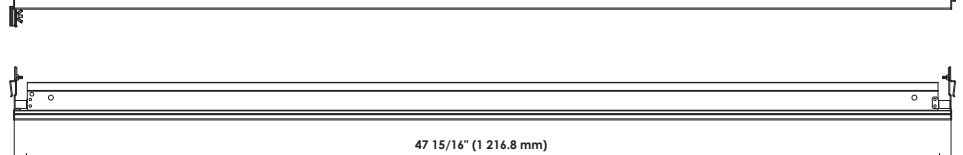




# EDGE

The EDGE is a light weight, linear suspended LED luminaire offering excellent uniform direct/indirect lighting distribution, allowing for the perfect addition to any modern office space. Available in a single color temperature or with selectable color temperature via a simple switch positioned on the top of the luminaire. Its mounting options provide versatility; it can be mounted individually in 4' and 8' sections or connected to create a continuous row system providing linear illumination.




Order code	Model number	Watts (W)	Volt (VAC)	Color temp. (K) <sup>2</sup>	Lumen (lm) <sup>3</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Dimming (Yes/No)	Finish	Power factor	THD (%)	Case qty (master)
<b>48"</b>													
L1DIP-4LS1/35K		40	120-277	3 500	4 200	105	80+	50 000	Yes	White	>0.9	<20	3
<b>48" 3 CCT Selectable</b>													
68965	L1DIP-G2-4LS1-3C	40	120-277	3 000/3 500/4 000	4 825	115	80+	54 000	Yes	White	>0.9	<20	2
<b>96"</b>													
L1DIP-8LS1/40K		80	120-277	4 000	8 400	105	80+	50 000	Yes	White	>0.9	<20	2

## L1DIP-4

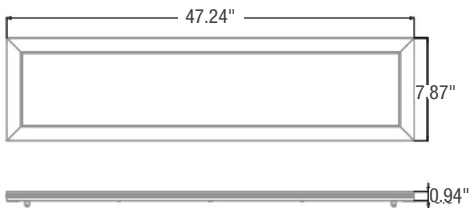

## L1DIP-8

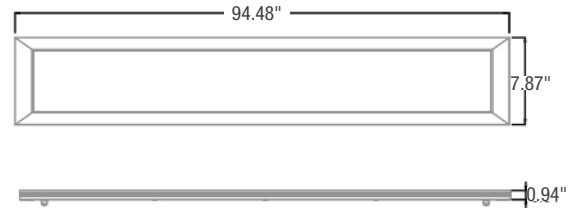

Direct / Indirect Light



dimmable fixture



ICES 005

6

damp location



5 yrs warranty







# LED Swivel (120 V)

The LED Swivel is the perfect solution to replace traditional Xenon undercabinet luminaires. Working directly off of line voltage, no LED driver is required and hardwired connections can be made directly inside the luminaire. For a quick and easy installation, use the 120V power cord plug to make the connection to the power outlet.

The LED Swivel also offers the option to swivel the module and direct the light where desired, depending on the needs of the application. The selectable color temperature feature enables to set the light to the right mood or activity; whether you need a warm and cozy atmosphere or a cooler task lighting.





- Selectable color temperature switch - 2 700 K / 3 000 K / 4 000 K
- Selectable power switch - two intensities
- For an installation without interruption, use the end to end connector
- Up to 300 W can be daisy chained
- 5 different lengths available


## LED SWIVEL

Order code	Part number	Watts (W)	Volts (VCA)	Color temp. (K) <sup>2</sup>	Lumen output (lm) <sup>2</sup>	Efficiency (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Case qty (master)
<b>9"</b>															
68481	UCS/9IN/120V/3W/SEL/FR/WH	1.5/3	120	2 700/3 000/4 000	108/204	58	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
<b>12"</b>															
67194	UCS/12IN/120V/5W/SEL/FR/WH/STD	2.5/5	120	2 700/3 000/4 000	195/359	60	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
<b>18"</b>															
67195	UCS/18IN/120V/8W/SEL/FR/WH/STD	4/8	120	2 700/3 000/4 000	365/624	65	90	50 000	102	White	Frosted	Yes	>0.90	<15	10
<b>24"</b>															
67196	UCS/24IN/120V/12W/SEL/FR/WH/STD	6/12	120	2 700/3 000/4 000	508/906	67	90	50 000	104	White	Frosted	Yes	>0.90	<15	10
<b>32"</b>															
67197	UCS/32IN/120V/16W/SEL/FR/WH/STD	8/16	120	2 700/3 000/4 000	573/1 038	66	90	50 000	104	White	Frosted	Yes	>0.90	<15	10

<sup>1</sup>Lower lumen output / <sup>2</sup>Highest lumen output at 3000K


## INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
1	1/2" Romex Hardwired Connector
1	End to End Connector
2	Mounting screws

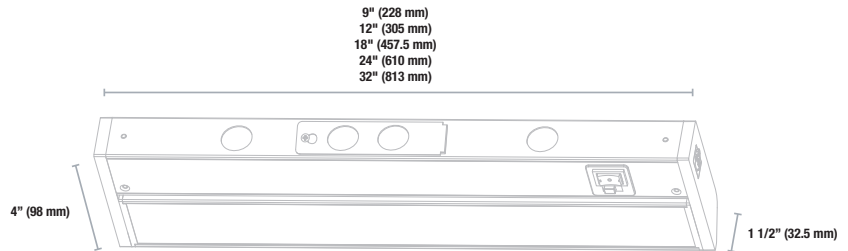

## ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67203	UCS/JUMPER/6IN/STD	6" Jumper	B	6 (152.5)	500
67204	UCS/JUMPER/24IN/STD	24" Jumper	B	24 (610)	250
67205	UCS/JUMPER/36IN/STD	36" Jumper	B	36 (914)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	C	6.5 (165)	50

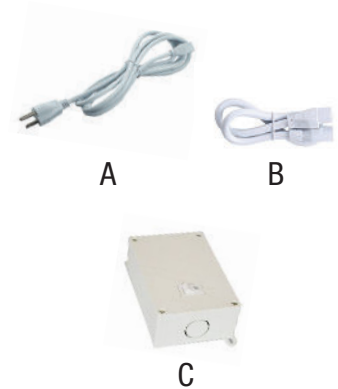

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)





# FLUO LED (120 V)

The FLUO LED is designed for 120 V applications and is easy and quick to install as no driver is required. With its seamless look, the FLUO LED is the ideal replacement for traditional fluorescent undercabinet or task lighting for either residential and commercial applications.




- Aluminum housing for better heat dissipation
- On/Off switch directly on the luminaire
- Frosted lens

## LED FLUO

Order Code	Part number	Watts (W)	Volts (VCA)	Color Temp. (K) <sup>2</sup>	Lumen Output (lm) <sup>3</sup>	Efficacy (lm/W)	CRI	Life L70 (hrs) <sup>4</sup>	Beam Angle (°)	Housing finish	Lens finish	Dimmable (Yes/No)	Power Factor	THD (%)	Case qty (master)
<b>9"</b>															
68478	UCFL/9IN/120V/3W/30K/FR/WH	3	120	3 000	235	78	90	50 000	120	White	Frosted	Yes	>0.90	<15	20
68479	UCFL/9IN/120V/3W/40K/FR/WH	3	120	4 000	235	78	90	50 000	120	White	Frosted	Yes	>0.90	<15	20
<b>12"</b>															
67251	UCFL/12IN/120V/5W/30K/FR/WH/STD	5	120	3 000	360	72	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67252	UCFL/12IN/120V/5W/40K/FR/WH/STD	5	120	4 000	360	72	90	35 000	120	White	Frosted	Yes	0.95	<15	20
<b>24"</b>															
67253	UCFL/24IN/120V/10W/30K/FR/WH/STD	10	120	3 000	730	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67254	UCFL/24IN/120V/10W/40K/FR/WH/STD	10	120	4 000	730	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
<b>36"</b>															
67255	UCFL/36IN/120V/15W/30K/FR/WH/STD	15	120	3 000	1 050	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67256	UCFL/36IN/120V/15W/40K/FR/WH/STD	15	120	4 000	1 050	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
<b>48"</b>															
67257	UCFL/48IN/120V/20W/30K/FR/WH/STD	20	120	3 000	1 450	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67258	UCFL/48IN/120V/20W/40K/FR/WH/STD	20	120	4 000	1 450	73	90	35 000	120	White	Frosted	Yes	0.95	<15	20
<b>60"</b>															
67259	UCFL/60IN/120V/25W/30K/FR/WH/STD	25	120	3 000	1 740	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20
67260	UCFL/60IN/120V/25W/40K/FR/WH/STD	25	120	4 000	1 740	70	90	35 000	120	White	Frosted	Yes	0.95	<15	20

Dimension	A
9"	228.50 mm
12"	305 mm
24"	610 mm
36"	915 mm
48"	1 220 mm
60"	1 524 mm

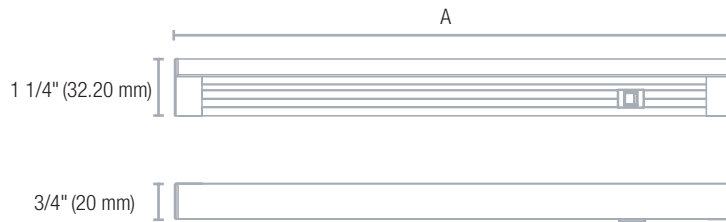

## INCLUDED IN THE BOX

Quantity	Description
1	Installation Sheet
2	Fixing clips
1	End to End Connector
2	Mounting screws

## ACCESSORIES

Order code	Description	Type
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box
67202	UCS/PLUG/120V/STD	120 V Power Cord Plug
67203	UCS/JUMPER/6IN/STD	6" Jumper
67204	UCS/JUMPER/24IN/STD	24" Jumper
67205	UCS/JUMPER/36IN/STD	36" Jumper





# LED Puck Light (120 V)


There is need for an LED driver with the line voltage models, as they can be used directly with the 120 V power cord plug for a quick and simple installation. They can also be installed with the hardwire box for direct connections. The option of surface mounting or recessed installation also adds to the versatility of these LED puck lights.

- Recessed and surface mount installation
- Up to 20 LED puck lights can be installed in a row
- Sturdy aluminum housing to better dissipate the heat
- Gimbal feature to reduce glare and direct the light where needed




## LED PUCK LIGHTS - LINE VOLTAGE (120 V)

Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
<b>LED Puck Light - 1 Wire</b>													
67101	UCP/1WIRE/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	50
67104	UCP/1WIRE/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
<b>LED Puck Light - 2 Wires</b>													
67100	UCP/2WIRES/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	50
67103	UCP/2WIRES/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	50
<b>LED Puck Light - Kits of 3 units</b>													
67102	UCP/KIT3/120V/4W/30K/FR/WH/STD	4	120	3 000	200	50	90	36 000	120	White	Frosted	Yes	20
67105	UCP/KIT3/120V/4W/30K/FR/BN/STD	4	120	3 000	200	50	90	36 000	120	Brushed nickel	Frosted	Yes	20

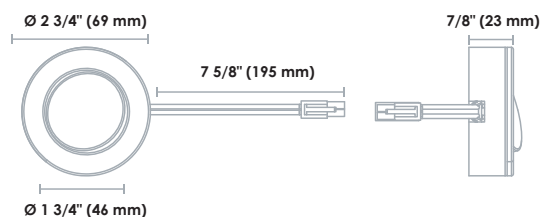


1 Wire

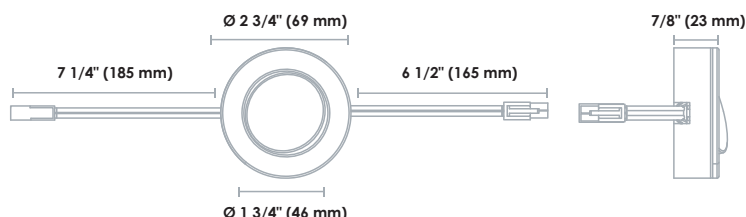

2 Wires

## ACCESSORIES

Order code	Description	Type	Figure	Length in. (mm)	Case qty (master)
67106	UCP/PLUG/120V/STD	120 V Power Cord Plug	A	73 5/8 (1 870)	100
67787	UC/HARDWIREBOX/120V/STD	Hardwire Box	B	6 1/2 (165)	50
67108	UCP/JUMPER/12IN/STD	12" Jumper	C	12 (304)	500
67109	UCP/JUMPER/36IN/STD	36" Jumper	C	36 (914)	500
67110	UCP/JUMPER/72IN/STD	72" Jumper	C	72 (1 828)	250



## INCLUDED IN THE BOX (KITS OF 3 UNITS)

- 1 Wire LED Puck - 1 unit
- 2 Wires LED Puck - 2 units
- 120 V Power Cord Plug - 1 unit

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)





# LED Puck Light

## - LOW VOLTAGE (12 V)

Stanpro's low voltage LED puck line has a sleek and modern look, with the slimmest profile on the market. Its magnetic design also allows to change the trim finish and the backplate to create a whole new look!

- Up to 10 LED puck lights can be installed in row
- Recessed and surface mount installation
- Sleek 7 mm profile




Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
<b>LED Puck Light</b>													
67168	UCP/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	200
67170	UCP/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	200
67172	UCP/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67174	UCP/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	200
67176	UCP/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	200
67178	UCP/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	200
<b>LED Puck Light - Kits of 3 units</b>													
67169	UCP/KIT3/12V/2.2W/30K/FR/WH/STD	2.2	12	3 000	150	68	90	50 000	120	White	Frosted	Yes	30
67171	UCP/KIT3/12V/2.2W/40K/FR/WH/STD	2.2	12	4 000	150	68	90	50 000	120	White	Frosted	Yes	30
67173	UCP/KIT3/12V/2.2W/30K/FR/BLK/STD	2.2	12	3 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67175	UCP/KIT3/12V/2.2W/40K/FR/BLK/STD	2.2	12	4 000	150	68	90	50 000	120	Black	Frosted	Yes	30
67177	UCP/KIT3/12V/2.2W/30K/FR/BN/STD	2.2	12	3 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30
67179	UCP/KIT3/12V/2.2W/40K/FR/BN/STD	2.2	12	4 000	150	68	90	50 000	120	Brushed nickel	Frosted	Yes	30



### ACCESSORIES (ORDER SEPARATELY)

Order code	Description	Type	Figure	Case qty (inner/master)
67180	UCP/TRIM/BACKPLATE/WH/STD	White Trim and Backplate	A	50 / 200
67181	UCP/TRIM/BACKPLATE/BLK/STD	Black Trim and Backplate	B	50 / 200
67182	UCP/TRIM/BACKPLATE/BN/STD	Brushed nickel Trim and Backplate	C	50 / 200
67183	UCP/ACC/HUB6/STD	Hub for 6 LED Puck Lights	D	30 / 120
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	Plug-in driver	E	- / 80
67185	UCP/ACC/DIMMER/STD	Dimmer Switch	F	30 / 120
67186	UCP/ACC/MOTIONSENSOR/STD	Motion Sensor	G	30 / 120

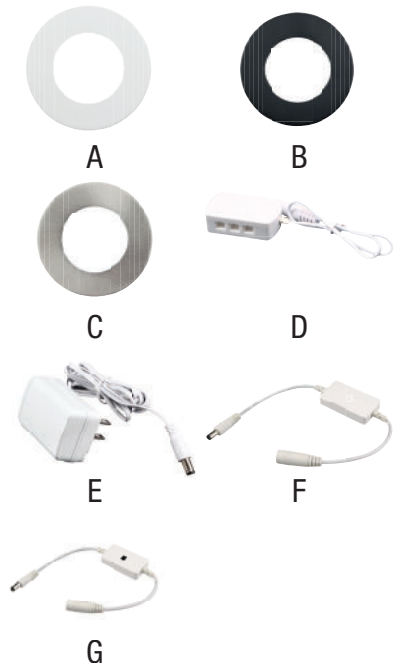

### INCLUDED IN THE BOX (KITS OF 3 UNITS)

LED Puck Lights - 3 units

HUB for 6 LED Puck lights - 1 unit

12 V Plug-in LED Driver (12 W) - 1 unit

Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)




# LED BARE WIRE PUCK LIGHTS

- Up to 10 LED puck lights can be installed in row
- The bare wires allow you to run the desired wire length between each puck
- Recessed installation only



Order code	Description	Watts per LED puck (W)	Volts (VAC)	Color temp. (K)	Lumen output per LED puck (lm)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Beam angle (°)	Finish	Lens finish	Dimming (Yes/No)	Case qty (master)
<b>LED puck light</b>													
67187	UCP/WIRES/12V/2W/30K/FR/WH/STD	2	12	3 000	120	60	90	50 000	120	White	Frosted	Yes	240

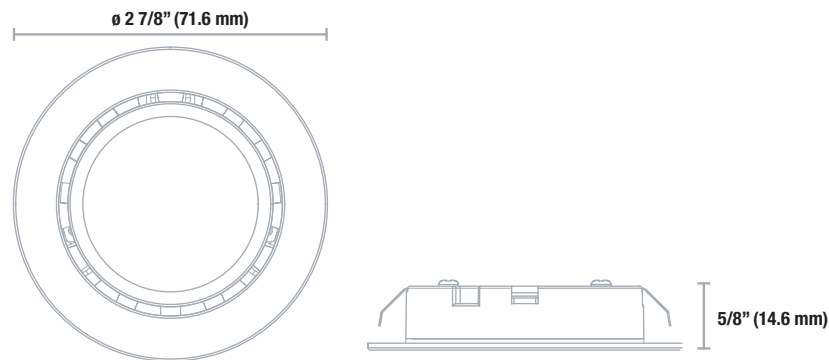

## LED DRIVERS COMPATIBLE WITH 12V PUCKS<sup>1</sup>

Order code	Description	Output power (W)	Input voltage (VAC)	Output voltage (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	Case qty (master)
<b>Plug-in - Non-Dimmable</b>									
67184	LED/DRIVER/12W/12V/PLUG/ND/STD	12	100-240	12	1 000	50/60	0.50	White	80
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	100
<b>Hardwired - Dimmable</b>									
65740	LED/DRIVER/50W/12V/HW/D/STD	50	100-130	12	410	50/60	0.95	White	20
<b>Hardwired - Non-Dimmable</b>									
65743	LED/DRIVER/10W/12V/HW/ND/STD	10	100-240	12	220	50/60	0.50	White	100
65744	LED/DRIVER/20W/12V/HW/ND/STD	20	100-240	12	250	50/60	0.90	White	100
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD	60	100-240	12	1 100	50/60	0.50	White	30
65746	LED/DRIVER/60W/12V/HW/ND/STD	60	90-264	12	1 400	47/63	0.93	White	10

<sup>1</sup> Technical drawings and dimensions on page 36








# DUOLED Hardwired Driver and Dimmer Switch

Stanpro's DUOLED offers an innovative compact design, combining a dimmer switch and an LED hardwired driver. It converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC), while offering outstanding dimming performances.

Having both products combined into one also eliminates the compatibility issues that are often seen between LED drivers and dimmer switches. DUOLED also offers a timeless and sleek look with a glossy white finish to blend seamlessly with your design.

- Converts line voltage (120 VAC) into low voltage (12 VDC / 24 VDC)
- Eliminates compatibility issues between the driver and the dimmer
- Excellent dimming performance (1% -100% dimming)

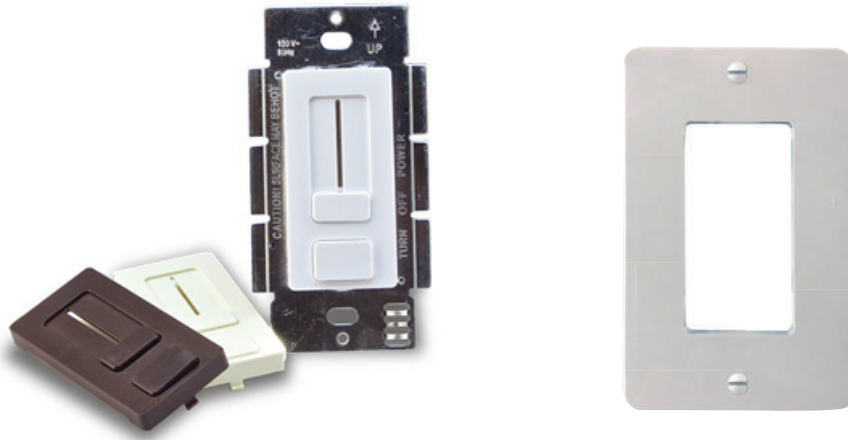



Order code	Description	Watts (W)	Volts (VAC)	Output Voltage (VDC)	Input Current (mA)	Frequency (Hz)	Power Factor	Face plate Finish	Case qty (master)
68299	DRIVER-DIMMER/S2/12V/60W	60	120	12	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25
68829	DRIVER-DIMMER/S2/24V/100W	100	120	24	1 000	60	0.9	Glossy Dark Brown, Glossy Light Almond and Glossy White	25

### ACCESSORY (ORDER SEPARATELY)


Part number	Type	Finish / color	Case qty (master)
67073	DRIVER-DIMMER/TRIM/WH/STD	Glossy White	100

### INCLUDED IN THE BOX

Quantity	Description
1	DuoLED
1	Barrier
3	Switch Plate
4	Twisted wire connectors
2	Mounting Screws

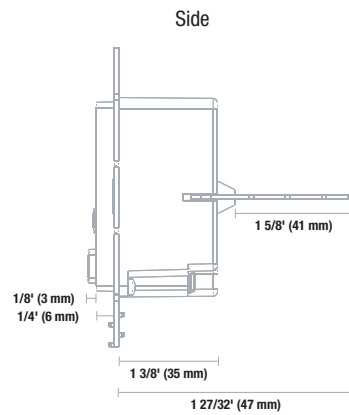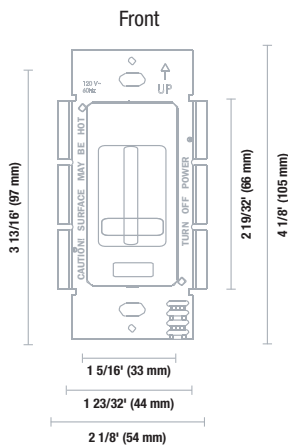


**DUOLED**

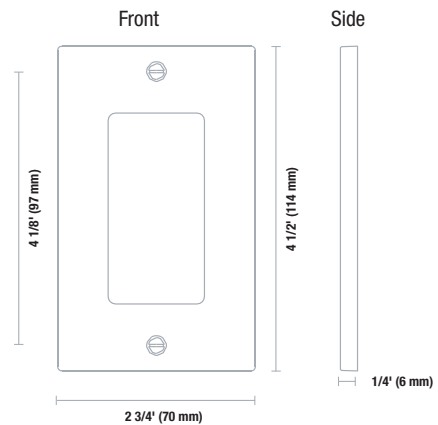

**Trim Plate**

### COMPATIBLE STANPRO PRODUCTS

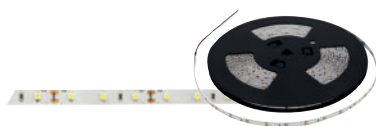

12 V / 24 V LED Tapes



24V Armonia™ LED Bars





# LED Tape and Extrusion

Stanpro LED tapes allow the customization of any area, as they can be surface mounted, recessed or suspended. These professional grade flexible LED tapes are ideal for a wide variety of applications, such as cabinetry, shelving, toe kicks, coves, edge lighting, etc.

Made of high quality LED chips, Stanpro's tapes offer durability, dimmability, high efficacy, constant color and a CRI above 90. They will easily adapt to all task or accent lighting needs.

The tapes can be installed on their own with peel and stick 3M construction adhesive back or within a covered aluminum extrusion for a diffused effect (except RGB and IP67 tapes). A wide variety of accessories are also available to complete the luminaire and allow for easy assembly; no soldering is needed with Stanpro's range of sturdy connectors.

All Stanpro tapes (except IP67), extrusions and lenses are also offered in custom lengths. Contact our Inside Sales team with your requirements to receive a quote on made to measure components.


Note: a minimum of ¼ inch must be kept free of tape at each end of the extrusion length to allow for the end caps.




# LED Tape

Order code	Description	Order code for custom length <sup>2</sup>	Watts		Volts (VAC)	Color temp. (K)	Lumen (lm) <sup>3</sup>		Efficiency (lm/W)	CRI	Life L70 (hrs)	Power factor	Case qty (master)
			(per ft.)	(per m)			(per ft.)	(per m)					
<b>12 V - 16.4' (5 m)</b>													
65895	TAPE/16.4'/1.5W/30K/12V/IP22/60/8MM/STD	66327	1.5	4.8	12	3 000	110	360	75	90+	50 000	>0.9	25
65880	TAPE/16.4'/1.5W/40K/12V/IP22/60/8MM/STD	66328	1.5	4.8	12	4 000	123	405	84	90+	50 000	>0.9	25
<b>24 V - 16.4' (5 m)</b>													
65881	TAPE/16.4'/1.5W/30K/24V/IP22/60/8MM/STD	66329	1.5	4.8	24	3 000	107	350	73	90+	50 000	>0.9	25
65882	TAPE/16.4'/1.5W/40K/24V/IP22/60/8MM/STD	66330	1.5	4.8	24	4 000	109	356	74	90+	50 000	>0.9	25
65883	TAPE/16.4'/2.9W/24K/24V/IP22/120/8MM/STD	66331	2.9	9.6	24	2 400	172	566	76	90+	50 000	>0.9	25
65884	TAPE/16.4'/2.9W/27K/24V/IP22/120/8MM/STD	66332	2.9	9.6	24	2 700	191	625	65	90+	50 000	>0.9	25
65885	TAPE/16.4'/2.9W/30K/24V/IP22/120/8MM/STD	66334	2.9	9.6	24	3 000	194	635	66	90+	50 000	>0.9	25
65886	TAPE/16.4'/2.9W/35K/24V/IP22/120/8MM/STD	66333	2.9	9.6	24	3 500	204	670	70	90+	50 000	>0.9	25
65887	TAPE/16.4'/2.9W/40K/24V/IP22/120/8MM/STD	66338	2.9	9.6	24	4 000	226	740	77	90+	50 000	>0.9	25
65888	TAPE/16.4'/2.9W/50K/24V/IP22/120/8MM/STD	66335	2.9	9.6	24	5 000	228	749	78	90+	50 000	>0.9	25
65893 <sup>4</sup>	TAPE/16.4'/2.9W/30K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	3 000	186	609	63	90+	50 000	>0.9	25
65894 <sup>4</sup>	TAPE/16.4'/2.9W/40K/24V/IP67/120/8MM/STD	-	2.9	9.6	24	4 000	213	697	73	90+	50 000	>0.9	25
65889	TAPE/16.4'/4.4W/30K/24V/IP22/180/8MM/STD	66336	4.4	14.5	24	3 000	300	984	68	90+	50 000	>0.9	25
65890	TAPE/16.4'/4.4W/40K/24V/IP22/180/8MM/STD	66337	4.4	14.5	24	4 000	314	1 030	71	90+	50 000	>0.9	25
<b>24 V - 65.6' (20 m)</b>													
65891	TAPE/65.6'/2.9W/30K/24V/IP22/120/8MM/STD	66334	2.9	9.6	24	3 000	194	635	66	90+	50 000	>0.9	25
65892	TAPE/65.6'/2.9W/40K/24V/IP22/120/8MM/STD	66338	2.9	9.6	24	4 000	226	740	77	90+	50 000	>0.9	25

## Dimensions & Cuts

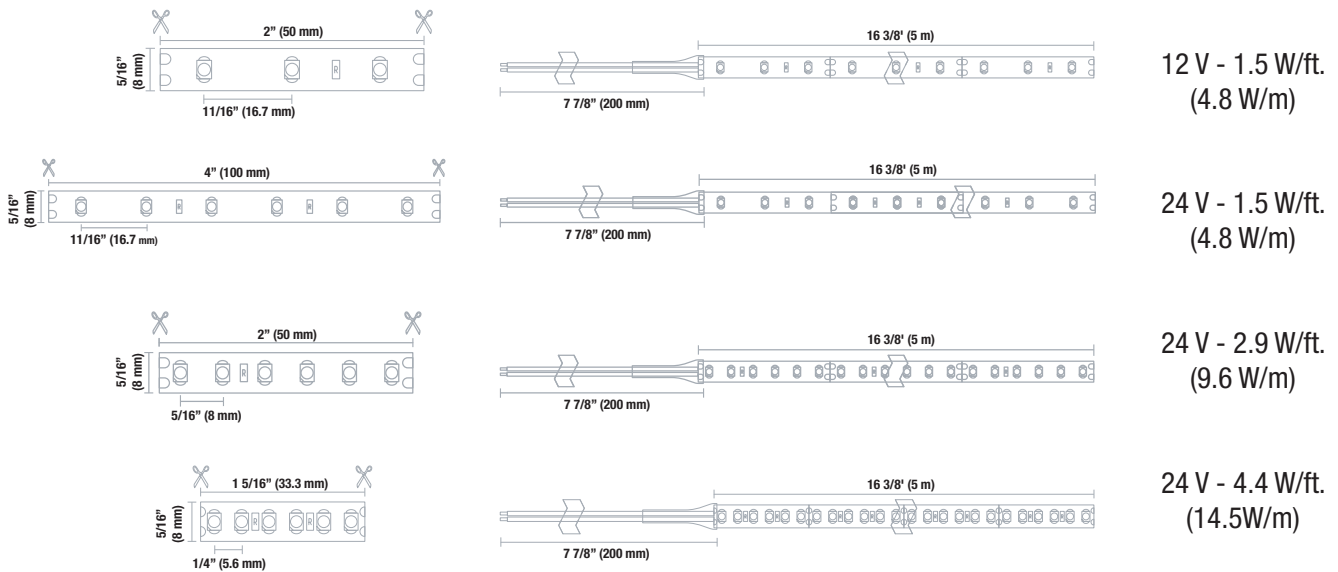

Lumen values are derived from photometric testing  
 For complete warranty information, please visit [www.standardpro.com](http://www.standardpro.com)  
<sup>1</sup> Available in custom lengths with the alternative order code  
<sup>2</sup> The LED tape reels are not returnable if already cut  
<sup>3</sup> Custom lengths of LED tapes are non-cancelable and non-returnable  
<sup>4</sup> Not compatible with Stanpro extrusion and lens products



# Extrusion & Lens

Stanpro extrusions are designed to be paired with LED tapes of a width of up to 14 mm. Made of high quality aluminum, they provide a sleek and sophisticated appearance for both residential and commercial applications. Adding a lens to the extrusion will complete the look of the luminaire; four different lens finishes are available.



## EXTRUSION

Order code	Description	Order code for custom length <sup>1</sup>	Series	Type	Length		Width		Height		Maximum LED tape width (mm)	Case qty (master)
					(ft.)	(m)	(in.)	(mm)	(in.)	(mm)		
65865 <sup>2</sup>	EXTRUSION/100/8'/ALUM/STD	66341	100	Sleek	8	2.4	¾	19	¼	6	14	10
65866	EXTRUSION/200/8'/ALUM/STD	66342	200	Deep	8	2.4	¾	19	7/16	12	14	10
65867	EXTRUSION/210/RECESSED/8'/ALUM/STD	66343	210	Recessed	8	2.4	1 1/32	26	7/16	12	14	10
65869	EXTRUSION/300/ROUNDED/8'/ALUM/STD	66345	300	Rounded	8	2.4	¾	19	7/16	12	14	5
65868	EXTRUSION/400/8'/ALUM/STD	66344	400	Versatile	8	2.4	¾	19	21/32	17	14	10
65870	EXTRUSION/500/CORNER/8'/ALUM/STD	66346	500	Corner	8	2.4	¾	19	7/16	12	14	10
66678	EXTRUSION/600/HEATSINK/8'/ALUM/STD	66679	600	Heatsink	8	2.4	1/2	13	3/32	2	10	20

## LENS

### Clear

- 96.5% of light output
- 50 to 80 Kelvin increase

### Frost


- 85% of light output
- 120 to 140 Kelvin reduction

### Opal

- 65% of light output
- 190 to 240 Kelvin reduction
- Dot free with a minimum of 37 LED chips per foot (120 LED chips per meter)

### Diffused

- 95% of light output
- 50 to 80 Kelvin reduction

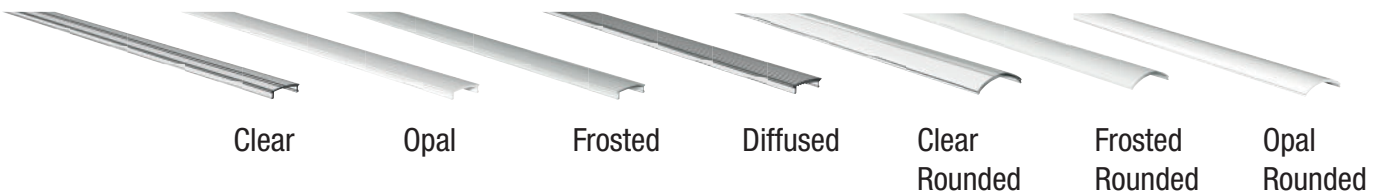

Order code	Description	Order code for custom length <sup>1</sup>	Finish	Length		Width		Compatible with series	Case qty (master)
				(ft.)	(m)	(in.)	(mm)		
65871	LENS/8'/CLEAR/STD	66347	Clear	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65872	LENS/8'/OPAL/STD	66348	Opal	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65873	LENS/8'/FROSTED/STD	66349	Frosted	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65874	LENS/8'/DIFFUSED/STD	66350	Diffused	8	2.4	23/32	18	100, 200, 210, 300, 400	20
65875	LENS/8'/ROUNDED/CLEAR/STD	66351	Clear	8	2.4	31/32	25	500	20
65876	LENS/8'/ROUNDED/FROSTED/STD	66352	Frosted	8	2.4	31/32	25	500	20
65877	LENS/8'/ROUNDED/OPAL/STD	66353	Opal	8	2.4	31/32	25	500	20

Not compatible with IP67 and RGB

<sup>1</sup> Available in custom lengths with the alternative order code

<sup>2</sup> The series 100 (sleek) can't be used with the tape to tape or tape to wire connectors




## END CAP (PACK OF 10)



Order code	Description	Type	Compatible with series	Case qty (master)
65896	EXTRUSION/100/ENDCAP/HOLE/STD	Perforated	100	50
65897	EXTRUSION/100/ENDCAP/PLAIN/STD	Plain	100	50
65898	EXTRUSION/200/ENDCAP/HOLE/STD	Perforated	200	50
65899	EXTRUSION/200/ENDCAP/PLAIN/STD	Plain	200	50
65900	EXTRUSION/210/ENDCAP/HOLE/STD	Perforated	210	50
65901	EXTRUSION/210/ENDCAP/PLAIN/STD	Plain	210	50
65904	EXTRUSION/300/ENDCAP/HOLE/STD	Perforated	300	50
65905	EXTRUSION/300/ENDCAP/PLAIN/STD	Plain	300	50
65902	EXTRUSION/400/ENDCAP/HOLE/STD	Perforated	400	50
65903	EXTRUSION/400/ENDCAP/PLAIN/STD	Plain	400	50
65906	EXTRUSION/500R/ENDCAP/HOLE/STD	Perforated	500	50
65907	EXTRUSION/500R/ENDCAP/PLAIN/STD	Plain	500	50

## FIXING CLIP (PACK OF 2)

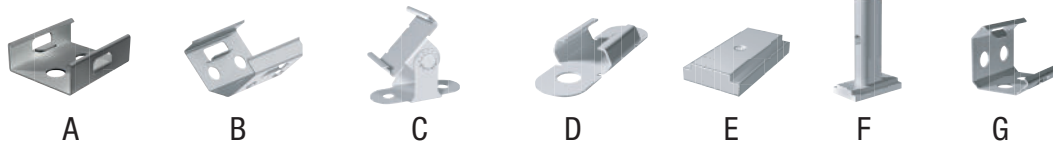

Order code	Description	Type	Figure	Compatible with series	Case qty (master)
65908	EXTRUSION/FIXCLIP/180/STD	180°	A	100, 200, 300, 400	100
65909	EXTRUSION/FIXCLIP/45/STD	45°	B	100, 200, 400	100
65910	EXTRUSION/FIXCLIP/ADJ/STD	Adjustable	C	100, 200, 400	100
65911	EXTRUSION/FIXCLIP/INV/STD	Invisible	D	400	100
65913	EXTRUSION/MAGNET/STD	Magnet	E	400	100
65912	EXTRUSION/SUSPENSIONKIT/STD	Suspension Kit (single pack)	F	400	50
65914	EXTRUSION/FIXCLIP/500/CORNER/STD	For corner	G	500	100

## ACCESSORIES



Order code	Description	Type	Figure	Qty per pack	Case qty (master)
<b>Connector</b>					
66130 <sup>1</sup>	TP-CONN-SING END 1	Tape to Wire (8 mm)	A	10	300
66132	TP-CONN-IN LINE 1	Tape to Tape (8mm)	A	10	300
66239 <sup>1</sup>	TP-CONN-WIRE2WIRE	Wire to Wire (8mm)	B	10	300
66771 <sup>2</sup>	TP-CONN-2WAY	Two way - Wire to Wire	C	1	100
66242 <sup>2</sup>	TP-CONN-5WAY	Five way - Wire to Wire	D	5	200
<b>Accessory</b>					
66240	TP-CONN-DC-FEM	Wire to DC Female	E	1	50
66241	TP-CONN-DC-MALE	Wire to DC Male	F	1	50
66243	TP-DOUBLE-FACE-33M	Double face tape	G	1	10
67630	TP-JOIN-LSHAPE	L Shape PCB Joiner	H	1	250
67631	TP-JOIN-TSHAPE	T Shape PCB Joiner	I	1	250

<sup>1</sup> Compatible wire : 20-22 AWG TR64 type  
<sup>2</sup> Compatible wire : 12-24 AWG



# LED Driver

## 12 V

Order code	Description	Output power (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	DC Connector (Yes/No)	IP rating	Case qty (master)
<b>Hardwired - Dimmable</b>											
65740 <sup>1</sup>	LED/DRIVER/50W/12V/HW/D/STD	50	100-130	12	410	50/60	0.95	White	No	IP20	20
<b>Hardwired - Non-dimmable</b>											
65743	LED/DRIVER/10W/12V/HW/ND/STD	10	100-240	12	220	50/60	0.50	White	No	IP65	100
65744	LED/DRIVER/20W/12V/HW/ND/STD	20	100-240	12	250	50/60	0.90	White	No	IP65	100
65745	LED/DRIVER/60W/12V/HW/ND/VS/STD	60	100-240	12	1 100	50/60	0.50	White	No	IP67	30
<b>Plug-in - Non-dimmable</b>											
62265 <sup>2</sup>	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	Yes	IP20	20
62266	LED/TAPE/36W/12V/RGB/PS/ND/STD	36	100-240	12	1 500	50/60	0.80	White	Yes	IP20	50



## 24 V

Order code	Description	Output power (W)	Input volts (VAC)	Output volts (VDC)	Input current (mA)	Frequency (Hz)	Power factor	Finish	DC Connector (Yes/No)	IP rating	Case qty (master)
<b>Hardwired - Dimmable</b>											
65741 <sup>1,3</sup>	LED/DRIVER/50W/24V/HW/D/STD	50	100-130	24	410	50/60	0.95	White	No	IP20	20
65742 <sup>1,3</sup>	LED/DRIVER/96W/24V/HW/D/STD	96	100-130	24	800	50/60	0.95	White	No	IP67	10
<b>Plug-in - Non-dimmable</b>											
65750	LED/DRIVER/60W/24V/PLUG/ND/STD	60	100-240	24	1 500	50/60	0.50	Black	Yes	IP20	36

<sup>1</sup> For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)

<sup>2</sup> For complete warranty information, please visit [www.standardpro.com](http://www.standardpro.com)


<sup>3</sup> Needs to be paired with a wire to DC Female connector (66240)

<sup>4</sup> If used with Armonia™ LED bars systems - needs to be paired with a wire to DC male connector (66241)




# Dimensions Extrusions and LED Drivers

## EXTRUSIONS

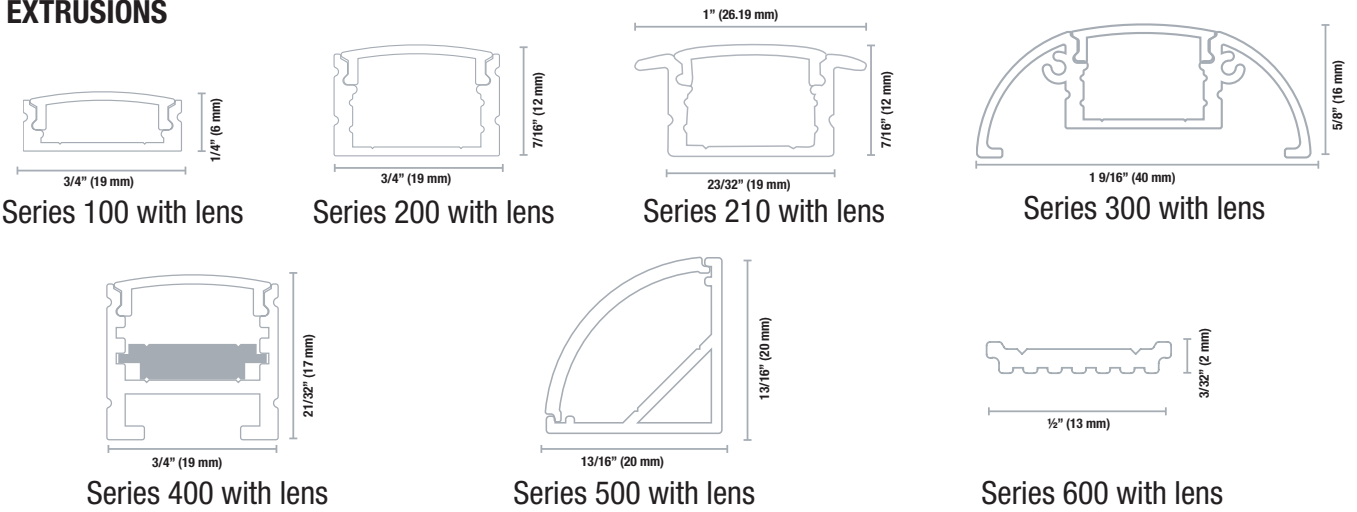

## LED DRIVERS

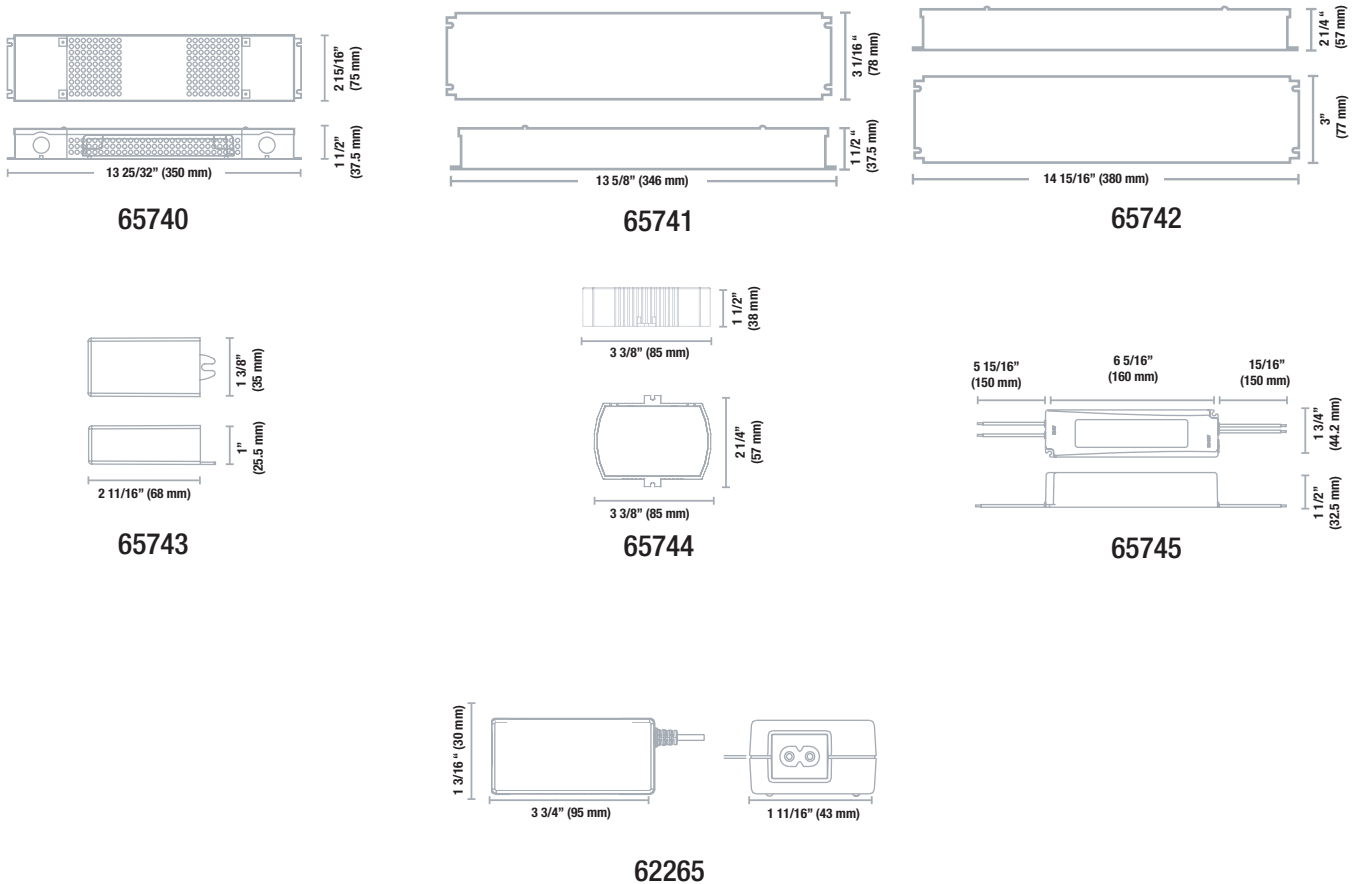



# RGB LED Tape

The RGB LED Tape is ideal to add a unique touch of color to any application. It allows to change the lighting design and ambiance of an entire room with one simple click. The wireless remote control enables the selection of multiple modes, levels of brightness and the speed of color changes.



## LED TAPE



Order code	Description	Order code for custom length	Watts (W) (per ft.)	Watts (W) (per m)	Volts (VAC)	Color temp. (K)	Lumen (lm) (per ft.)	Lumen (lm) (per m)	Efficiency (lm/W)	CRI	Life L70 (hrs)	Power factor	Case qty (master)
<b>24 V - 32.8' (10 m)</b>													
66838	TAPE/32.8'/4.4W/RGB/24V/I P22/60/10MM/STD	66839	4.4	14.5	24	3 000	170	558	38	90+	44 000	>0.9	25

## LED RGB WIRELESS REMOTE AND CONTROLLER


Order code	Description	Type	Controller maximum power (W)	Output volts (VDC)	Case qty (master)
66840	TAPE/RGB/CONTROLLER-REMOTE/12V-24V/STD	Radio Frequency	100	12-24	50

## ACCESSORIES


Order code	Description	Type	Figure	Quantity per pack	Case qty (master)
<b>Connector</b>					
66131	TAPE/10MM/SINGLE_END_CONN/RGB/STD	Tape to Wire (RGB)	A	10	300
66133	TAPE/10MM/IN_LINE_CONN/RGB/STD	Tape to Tape (RGB)	B	10	300
<b>Accessory</b>					
66240	TAPE/WIRE_TO_DC_FEMALE/STD	Wire to DC Female	C	1	50
66241	TAPE/WIRE_TO_DC_MALE/STD	Wire to DC Male	D	1	50
66243	TAPE/DOUBLE_FACE_33M/STD	Double Face Tape	E	1	10

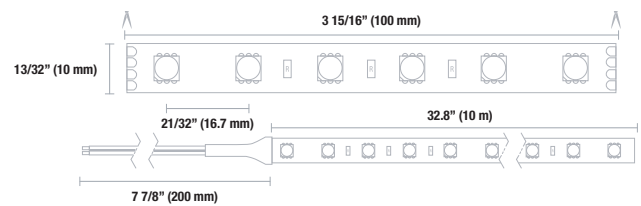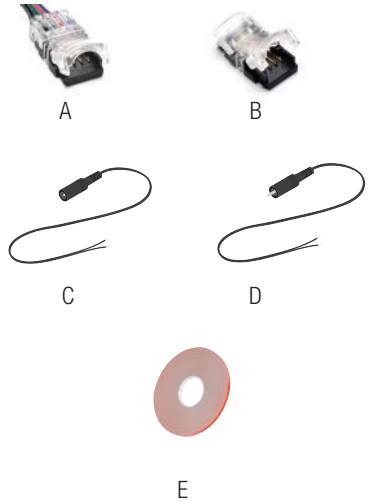

**24 V - 4.4 W/ft. (14.5 W/m)**

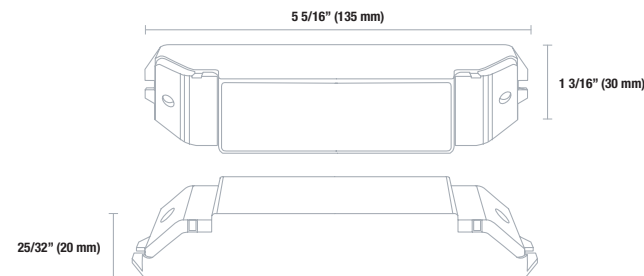

## Controller

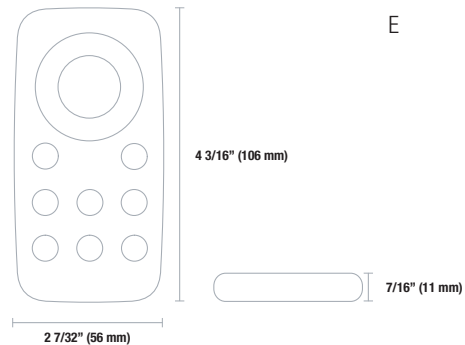

## Wireless Remote

Lumen values are derived from photometric testing  
 For complete warranty information, please visit [www.standardpro.com](http://www.standardpro.com)  
 \*Not compatible with Stanpro extrusion and lens products  
 † Custom lengths of LED tapes are non-cancelable and non-returnable



# LED Tape Kit


Stanpro's LED Tape kits are designed to add ambiance and character to any setting. Delivering even, brilliant light, the color changing RGB, cool white and warm white colors can be used in a multitude of applications, both indoor and outdoor, ranging from under cabinets to cove and perimeter applications.



Order code	Description	Watts per reel (W)		Volts (VDC)	Color	Length		Life L70 (hrs)	Lumen output (lm)		Number of LED chips		Dimming capability (Yes/No)	Case qty (master)
		(per ft.)	(per m)			(ft.)	(m)		(per ft.)	(per m)	(per ft.)	(per m)		
<b>LED Tape Kits</b>														
61953	LED/TAPE/16.4/5050/RGB KIT/12V/50M/STD	1.6	5.4	12	RGB	16.4	5	50 000	-	-	9	30	Yes	20
61954	LED/TAPE/16.4/5050/WW KIT/12V/50M/STD	1.7	5.6	12	Warm white	16.4	5	50 000	145	175.6	9	30	No	20
61955	LED/TAPE/16.4/5050/CW KIT/12V/50M/STD	1.7	5.6	12	Cool white	16.4	5	50 000	145	175.6	9	30	No	20
<b>Plug-in Drivers - Non-dimmable</b>														
62265	LED/TAPE/36W/12V/WW+CW/PS/ND/STD	-	-	12	White	6.56	2	-	-	-	-	-	-	20
62266	LED/TAPE/36W/12V/RGB/PS/ND/STD	-	-	12	White	6.56	2	-	-	-	-	-	-	50

## ACCESSORIES

Order code	Description	Type	Case qty (inner/master)
61956	LED/TAPE/RGB/CONNECTOR/STD	RGB Connector	10/50
61957	LED/TAPE/WW+CW/CONNECTOR/STD	Connector	10/100
62017	LED/10PCS TAPE LIGHT 12V MOUNTING CLIPS	Mounting clips	1/100



## INCLUDED IN THE BOX

- 1 tape light 16.4' (5 m)
- 1 plug-in driver
- 1 RGB remote control (for RGB kit only)



Lumen values are derived from photometric testing  
For a complete list of compatible dimmers, please visit [www.standardpro.com](http://www.standardpro.com)  
Note: To avoid decreases in light levels, avoid connecting more than 16.4' (5 m) at a time





# LED 120 V Tape

This LED tape works on direct line voltage 120 V, no need for an additional driver to be added to the system. Its robust construction, PVC jacket as well as IP65 certification makes it ideal for accent lighting in any retail, residential or commercial, indoor or outdoor applications. Offered in 10 or 30 meters reel, it can be cut in field for a complete custom solution.

- Can be cut every 1'
- 164' maximum run
- High lumen efficacy
- Each reel includes a hardwired end molded
- Plug-in or hardwire connectors sold separately




Order code	Description	Watts (W)		Volts (VAC)	Color temp. (K)	Lumen output (lm)		Efficacy (lm/W)	CRI	Life L70 (h)	Power factor	Case qty (master)
		(per ft.)	(per m)			(per ft.)	(per m)					
<b>32.8' (10 m)</b>												
67632 <sup>1</sup>	TAPE/32.8'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67635	TAPE/32.8'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67638	TAPE/32.8'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1
<b>98.4' (30 m)</b>												
67633 <sup>1</sup>	TAPE/98.4'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67636	TAPE/98.4'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67639	TAPE/98.4'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1
<b>164' (50 m)<sup>1</sup></b>												
67634	TAPE/164'/4W/27K/120V/IP65/72/16MM/STD	4	13.2	120	2 700	350	1 148	87	90+	50 000	>0.9	1
67637	TAPE/164'/4W/30K/120V/IP65/72/16MM/STD	4	13.2	120	3 000	350	1 148	87	90+	50 000	>0.9	1
67640	TAPE/164'/4W/40K/120V/IP65/72/16MM/STD	4	13.2	120	4 000	350	1 148	87	90+	50 000	>0.9	1

Lumen values are derived from photometric testing  
 For complete warranty information, please visit [www.standardpro.com](http://www.standardpro.com)  
<sup>1</sup> Consult factory for availability



# Dimensions & Cuts

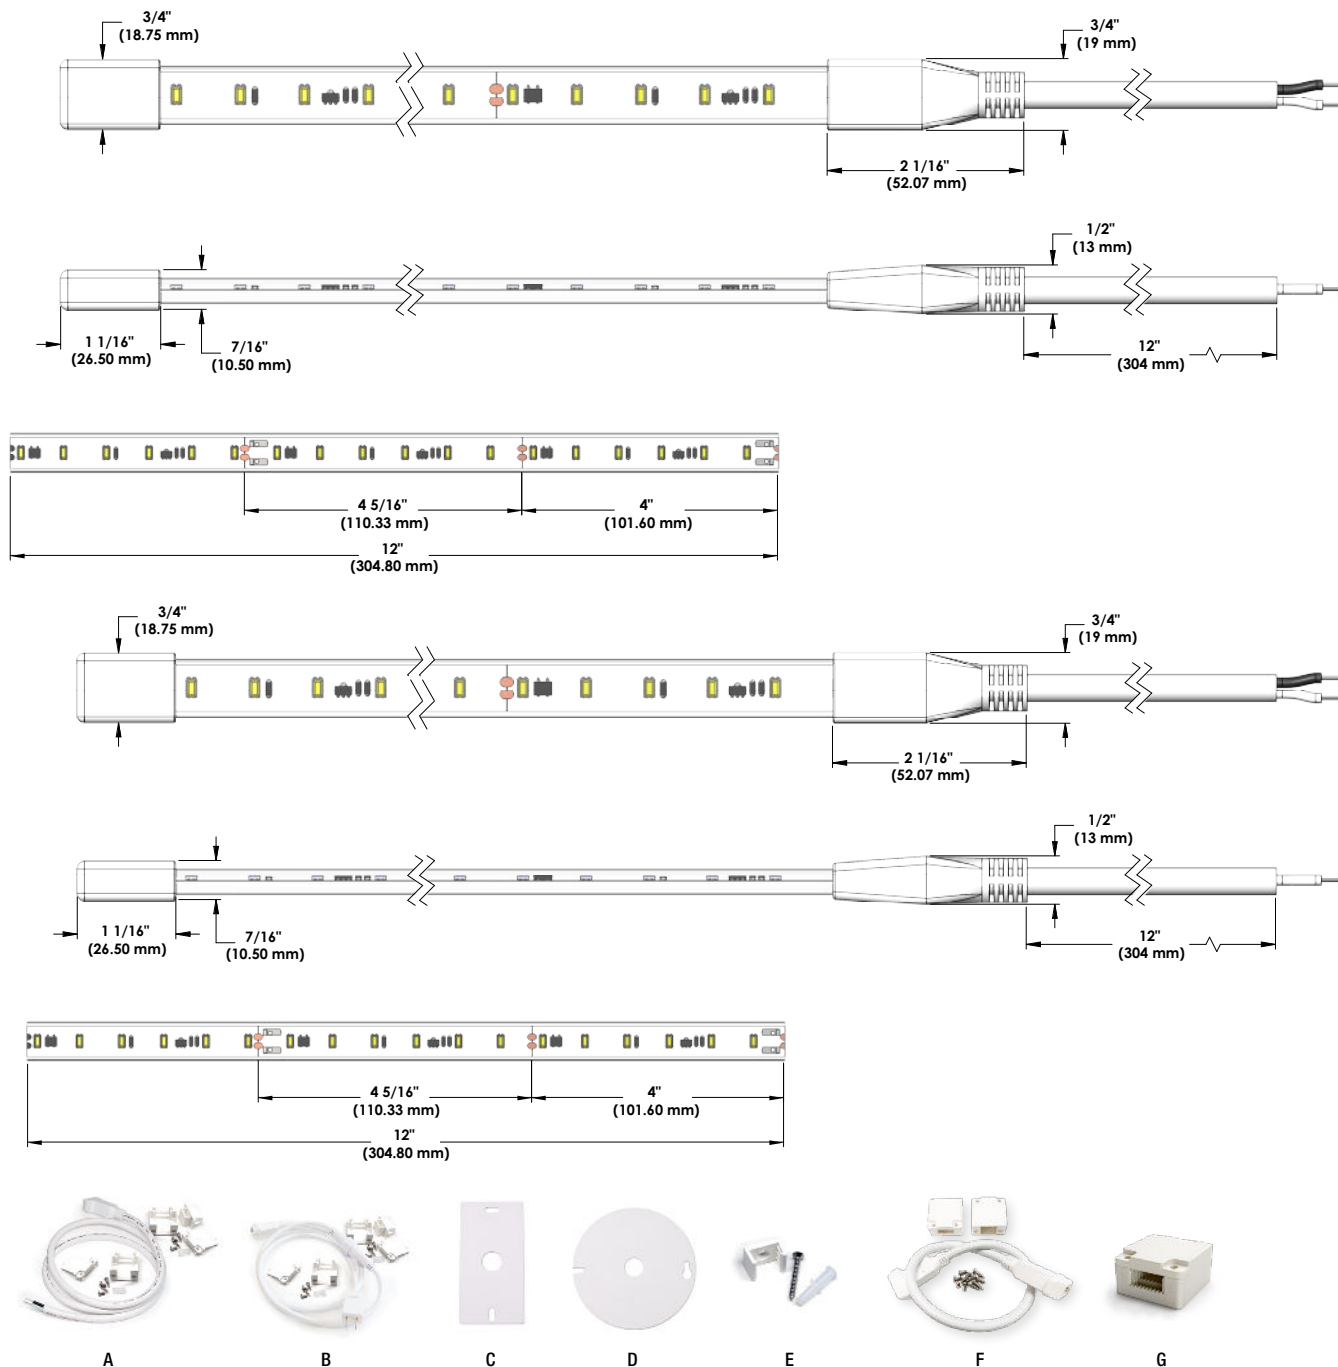

Order code	Description	Type	Figure	Qty per pack	Master case qty
67641 <sup>1</sup>	TAPE/HARDWIREKIT/120V/STD	Hardwire Kit (40" (1 000 mm))	A	1	50
67642 <sup>2</sup>	TAPE/PLUG/120V/STD	120 V Power Cord (44" 1/4 (1 132 mm))	B	1	50
67643	TAPE/ELECTBOXCOVER/RECT/120V/STD	Electrical box cover plate - Rectangular	C	1	100
67644	TAPE/ELECTBOXCOVER/RND/120V/STD	Electrical box cover plate - Round	D	1	100
67645 <sup>2</sup>	TAPE/BRACKETS/120V/STD 10P	Mounting bracket	E	10	100
67904	TAPE/6IN/JUMPER/120V/STD	6" Jumper	F	1	100
67905	TAPE/12IN/JUMPER/120V/STD	12" Jumper	F	1	100
69020	TAPE/HARDWARE/120V/ENDCAPS	End Cap	G	1	50

<sup>1</sup> Includes brackets and screws.

<sup>2</sup> It is recommended to put a fixing clip every 6" to ensure secure installation.







Printed in Canada.

© 2021 STANDARD Products Inc. All Rights Reserved.

Data is based upon tests performed in a controlled environment.  
Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.

For the latest version, please refer to our website.

**[www.standardpro.com](http://www.standardpro.com)**



**STANPRO**

