

STANPRO

Lighting Systems Inc. | Systèmes d'éclairage Inc.

Filename: TL9204-30-3-M29°-A

Manufacturer: STANPRO

Luminaire: LED Track Light

Luminaire Cat: TL9204-30-3-M29-A

Lamp Output: 1 lamp, rated Lumens/lamp: 2283.1

Max Candela: 7,313.3 at Horizontal: 0°, Vertical: 0°

Input Wattage: 27.81

Luminous Opening: Rectangle w/Luminous Sides (L: 0.35", W: 0.35", H: 0.43")


Test Date: 2014/10/23

Photometry : Type C

CIE Class: Direct



Cutoff Class: Cutoff

Nema Type: 4 X 4

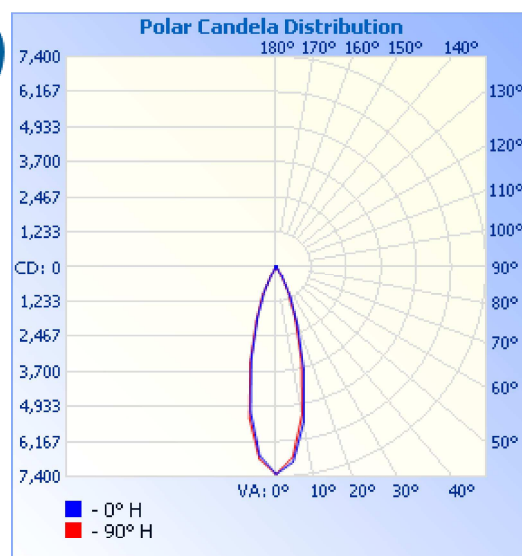

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	2,065.1	90.4%	92.1%
0-40	2,156.2	94.4%	96.2%
0-60	2,202.8	96.5%	98.3%
60-90	21.0	0.9%	0.9%
70-100	13.8	0.6%	0.6%
90-120	7.9	0.3%	0.4%
0-90	2,223.8	97.4%	99.2%
90-180	17.7	0.8%	0.8%
0-180	2,241.5	98.2%	100%

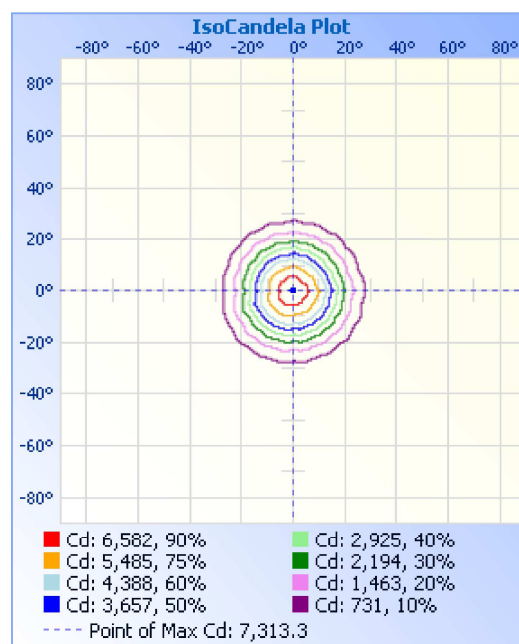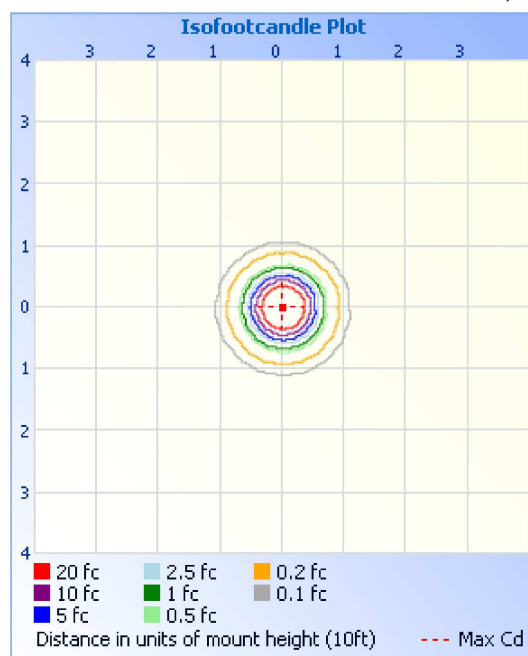

Illuminance at a Distance			
	Center Beam fc	Beam Width	
3.0ft	813 fc	1.6 ft	1.6 ft
6.0ft	203 fc	3.2 ft	3.1 ft
9.0ft	90.3 fc	4.8 ft	4.7 ft
12.0ft	50.8 fc	6.3 ft	6.2 ft
15.0ft	32.5 fc	7.9 ft	7.8 ft
18.0ft	22.6 fc	9.5 ft	9.3 ft
<div> <div></div> <div>Vert. Spread: 29.6°</div> </div> <div> <div></div> <div>Horiz. Spread: 29.1°</div> </div>			

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	70	50	30	0	70	50	30	0	50	30	20	50	30	20	50	30	20	50	30	20	0
RCR: 0	1.17	1.17	1.17	1.17	1.14	1.14	1.14	.97	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.99	.99	.99	.97
1	1.12	1.10	1.08	1.06	1.10	1.08	1.06	.93	1.04	1.02	1.01	1.00	.99	.98	.96	.96	.95	.96	.96	.95	.93
2	1.08	1.04	1.01	.98	1.06	1.02	.99	.90	.99	.97	.95	.96	.94	.93	.93	.92	.91	.93	.92	.91	.89
3	1.04	.99	.95	.92	1.02	.98	.94	.86	.95	.92	.90	.93	.90	.88	.90	.88	.87	.90	.88	.87	.85
4	1.00	.94	.90	.87	.99	.93	.89	.83	.91	.88	.85	.89	.87	.84	.88	.85	.83	.88	.85	.83	.82
5	.97	.90	.86	.83	.95	.90	.85	.80	.88	.84	.82	.86	.83	.81	.85	.82	.80	.85	.82	.80	.79
6	.94	.87	.82	.79	.92	.86	.82	.77	.85	.81	.78	.83	.80	.78	.82	.79	.77	.82	.79	.77	.76
7	.91	.83	.79	.76	.89	.83	.79	.74	.82	.78	.75	.81	.77	.75	.79	.77	.74	.79	.77	.74	.73
8	.88	.80	.76	.73	.87	.80	.76	.72	.79	.75	.72	.78	.74	.72	.77	.74	.72	.75	.72	.69	.71
9	.85	.78	.73	.70	.84	.77	.73	.69	.76	.72	.70	.75	.72	.70	.75	.72	.69	.75	.72	.69	.68
10	.82	.75	.71	.68	.81	.75	.70	.67	.74	.70	.67	.73	.70	.67	.72	.69	.67	.72	.69	.67	.66

Luminaire Report Summary

IESNA:LM-63-1995

[TEST]

[DATE] 2014/10/23

[MANUFAC] STANPRO

[LUMCAT] TL9204-30-3-M29-A

[LUMINAIRE] LED Track Light

[LAMPCAT]

[LAMP]

FILE: CANDELA MULTIPLIER: 1

FILE: VERTICAL ANGLES: 37, HORIZONTAL ANGLES: 37

FILE: COORDINATE SYSTEM: TYPE C

FILE: UNIT OF MEASURE: METRIC

FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.29 copyright 2003-2015 by jSolutions, Inc.

Reported data calculated from manufacturer's data file, based on IES recommended methods.