

GIMBAL HIGH OUTPUT 3.5" LED Downlight

The LED Gimbal High Output downlight combines a sleek design with a small aperture, all without compromising the performance and quality of light. By using the switch located on the junction box, the ideal color temperature can be easily set according to the needs of the space. The LED Gimbal High Output downlight is suitable for all types of ceilings and environments, thanks to the airtight design and IC-rating.



■ Adapted color temperature

Choose the right color temperature for your living space. Available in a single color temperature 3 000, 4 000 and dim to warm 3 000-2 200 K or integrated 2 700/3 000/ 3 500/4 000/5 000 K selectable temperature.

■ FT6 Cable Rating



The FT6 rated cable allows this LED downlight with remote driver to be installed in plenum ceilings. Perfect for commercial buildings as well as residential environments.

■ Option for contractor projects

Convenient bulk pack of 10 units available in 3 000 K white finish LED module and LED driver packaged separately. This option allows two phases delivery on projects and less waste and packaging material on site.

GIMBAL HIGH OUTPUT

Sleek design and a high quality light, all combined into one downlight!

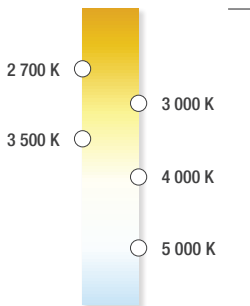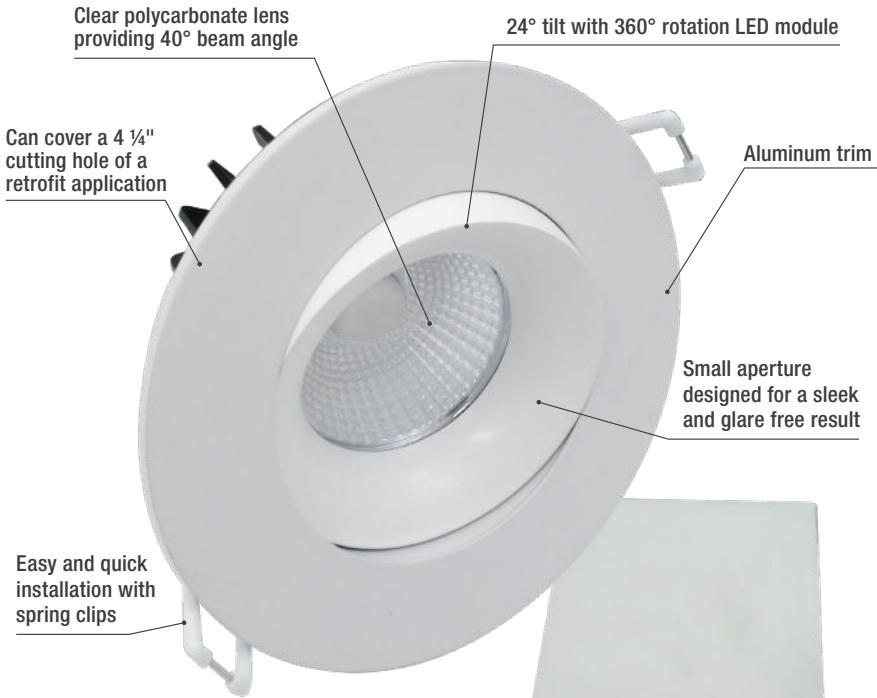

CCT switch the side of the junction box




Bulk pack of 10 units

Perfect for contractor projects!

LED DRIVER



120 V or
120 - 277 V



LED MODULE


Only available in round, white, 3000 K



2233 rue de l'Aviation, Dorval, QC H9P 2X6
514.342.1199, 1.800.361.6965 • 514.807.3011 • www.standardpro.com

Variety of finishes

Available in white, black or brushed nickel

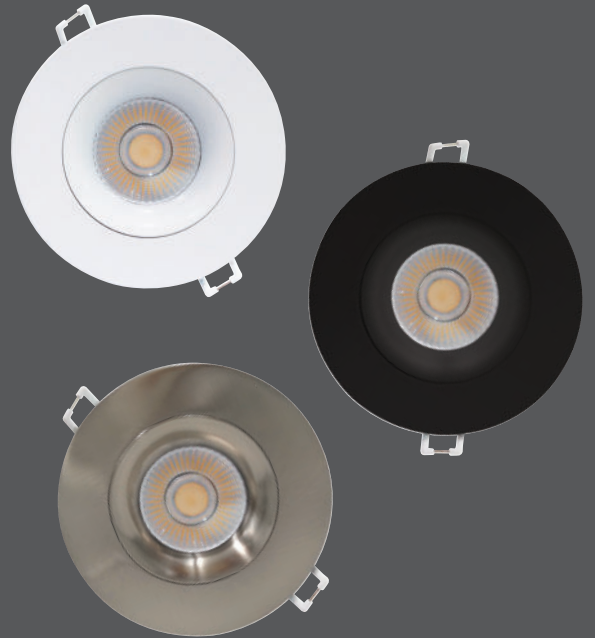

Compatible accessories

Select a variety of accessories for different installation options!

Adjustable mounting plate



Mounting plate with hanger bars



Square mounting plate



Vapor barrier extender



6' FT6 Extension cord¹



¹ Only available with single color temperature downlight.