

WCI-L GEN 2 MINI WALL PACK

The WCI-L GEN 2 is a high performing compact multi-purpose wall pack whose color temperature is adjustable which allow the users to select its preference via a field adjustable integrated switch. It also features a photocell which can be easily disabled. This luminaire has been designed for use in most commercial and residential installations. Typical applications include security lighting over entrances, stairwells and pedestrian areas.



quick
ship



■ Color Selectable

An all-in one solution offering versatility, with the ability to change the color temperature (3 000/4 000/5 000) to suit a variety of projects.

■ Photocell

This Mini Wall Pack has a 120-277 V integrated photocell which can easily be disabled.

■ Distribution type


Type IV fitting multiple outdoor applications.

Highly Efficient Mini Wall Pack Solution!



Selectable Color Temperature Switch

Select your CCT 3 000, 4 000, 5 000 K upon installation

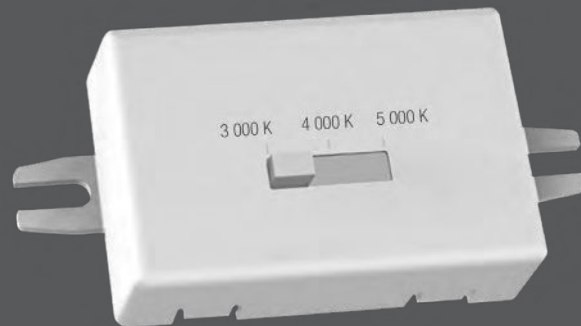

Specification Table

Order code	Model number	DLC unique ID	Watts (W)	Volts (VAC)	Color temp. (K) ¹	Lumen output (lm) ²	Efficiency (lm/W)	CRI	Life L70 (hrs) ³	Tested hours LM-80 (hrs) ³	Calculated TM21 (hrs) ³	B.U.G.	Distribution type	Finish	Dimming (Yes/No)	Power factor	THD (%)	Traditional equivalent (W)	Master case qty
CCT Selectable with Integrated Photocell ⁴																			
68988	WCI-LS2B-W-3C-BR-P	PDEZ4M7J	20	120-277	3 000/4 000/5 000	2 560	135	80+	54 000	9 000	140 000	B1 U3 G2	IV	Bronze	Yes	≥0.90	≤20	70	10
68989	WCI-LS2B-W-3C-WH-P	PDEZ4M7J	20	120-277	3 000/4 000/5 000	2 560	135	80+	54 000	9 000	140 000	B1 U3 G2	IV	White	Yes	≥0.90	≤20	70	10

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from DLC reported data at 3 000 K. Initial lumens range: +/- 10 %.

³ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

⁴ Integrated ON/OFF photocell that can be easily disabled.