

Installation Instructions / Notice de montage



WARNING
ELECTRICAL SHOCK HAZARD

AVERTISSEMENT
RISQUE D'ÉLECTROCUTION

READ and UNDERSTAND these instructions before installing the luminaire.

LISEZ cette notice et assurez-vous de la COMPRENDRE avant de monter le luminaire.

EN

Disconnect the Electrical supply power at the services panel (fuse or circuit breaker box). Failure to do so could result in serious injury. Only qualified electricians should install this luminaire and the installation MUST be conform to the Canadian Electrical Code Part I, NEC and any local codes and ordinances. Any change or modifications not expressly approved by the party responsible for compliance could void the authority to operate the equipment. Makes sure you have the proper tools and materials to complete the installation before attempting to install the luminaire

FR

Couper l'alimentation du courant électrique au panneau de service (boîte de fusible ou disjoncteur) sans quoi il pourrait en résulter des blessures sérieuses. Seuls des électriciens qualifiés devraient installer ce luminaire et l'installation doit être conforme au Code Canadien de l'Électricité Première Partie, NEC ainsi qu'aux codes et règlements locaux. Tout changement ou toute modification, qui n'a pas été expressément approuvé par l'entité responsable de la conformité de cette unité aux standards applicables, pourrait résulter en l'annulation de la certification permettant l'utilisation de cette unité. Assurez-vous d'avoir les outils et les matériaux nécessaires à l'installation avant d'essayer d'installer le luminaire.

WARNING: Read luminaire labels before make electrical connections

SLIP FITTER MOUNT (Fig. 1)

1. Adjust the luminaire orientation by using the adjustment bolt.
2. Mount the luminaire by using a pole with a diameter 2.5" and tighten it with mounting screws.
3. Open the pole wiring compartment cover and connect the white luminaire wire to NEUTRAL white wire supply, black luminaire wire to black LINE wire supply, green ground wire to green GROUND wire by using wire nuts.
4. Push wires inside the pole and secure the wiring compartment cover.
5. Apply power.

YOKE MOUNT (Fig. 2)

1. Adjust the luminaire orientation by using the adjustment bolt.
2. Use expansion bolts to secure the fixture on mounting surface.
3. Keep enough length wires to ensure adjusting angle unhindered.
4. Make the electrical wiring between the external power source and the luminaire cables by using a certificated outdoor waterproof electrical cable connector as shown in Fig. 2.
5. Apply power.

STRAIGHT ARM MOUNT* (Fig. 3)

1. Use the mounting arm to install the unit directly to the wall or a square pole by using the appropriate bolts.
2. Open the wiring compartment cover of luminaire and connect the white luminaire wire to NEUTRAL white wire supply, black luminaire wire to black LINE wire supply, green ground wire to green GROUND wire by using wire nuts.
3. Secure the wiring compartment cover to the luminaire and make sure that all wires connections are inside.
4. Apply power

ATTENTION: Lire les étiquettes du luminaire avant d'effectuer les connexions électriques

MONTAGE AVEC JOINT D'ARTICULATION (Fig. 1)

1. Ajuster l'orientation du luminaire en tournant le boulon de réglage.
2. Monter le luminaire sur un poteau de diamètre 2,5" en serrant les vis.
3. Ouvrir le couvercle du compartiment électrique du poteau et raccorder le fil blanc du luminaire au fil NEUTRE blanc d'alimentation, le fil noir du luminaire au fil d'alimentation de PHASE noir, le fil de mise à la terre vert au fil de mise à la terre vert en utilisant des capuchons de connexion.
4. Fermer le couvercle du compartiment électrique au poteau.
5. Mettre sous tension.


MONTAGE AVEC ÉTRIER (Fig. 2)

1. Ajuster l'orientation du luminaire en tournant le boulon de réglage.
2. Utiliser des boulons expansibles pour fixer solidement le luminaire sur la surface de montage.
3. Conserver une longueur de fil suffisante afin de s'assurer de pouvoir ajuster l'angle du luminaire.
4. Raccorder le câblage électrique entre la source d'alimentation externe et le luminaire en utilisant un connecteur étanche de câble électrique à l'extérieur certifié comme montré sur la Fig. 2.
5. Mettre sous tension.


MONTAGE BRAS À ANGLE DROIT* (Fig. 3)

1. Utiliser le bras de montage pour installer le luminaire directement au mur ou sur un poteau carré en utilisant les boulons appropriés.
2. Ouvrir le le couvercle du compartiment électrique du luminaire et raccorder le fil blanc du luminaire au fil NEUTRE blanc d'alimentation, le fil noir du luminaire au fil d'alimentation de PHASE noir, le fil de mise à la terre vert au fil de MISE À LA TERRE vert en utilisant des capuchons de connexion.
3. Fixer le couvercle du compartiment électrique au luminaire et s'assurer que toutes les raccordements sont à l'intérieur.
4. Mettre sous tension.


1 SLIP FITTER MOUNT / MONTAGE AVEC JOINT D'ARTICULATION

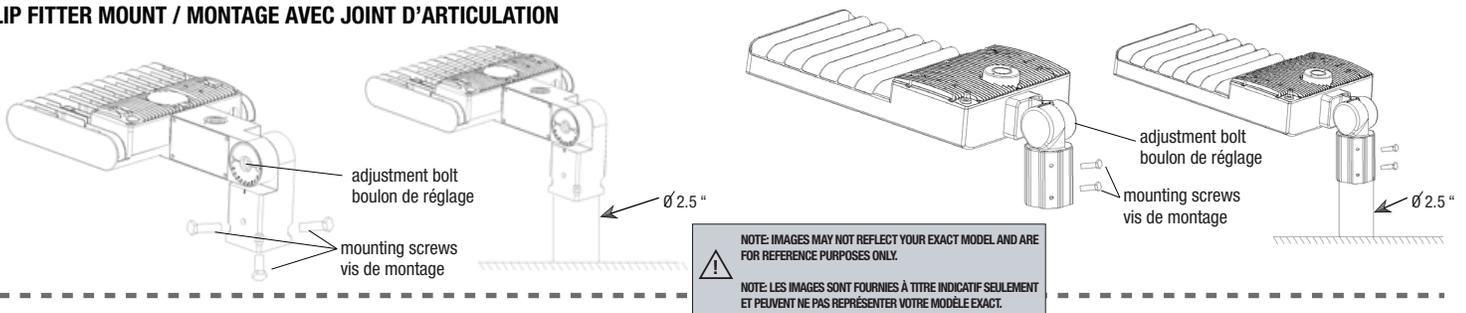

2 YOKE MOUNT / MONTAGE AVEC ÉTRIER

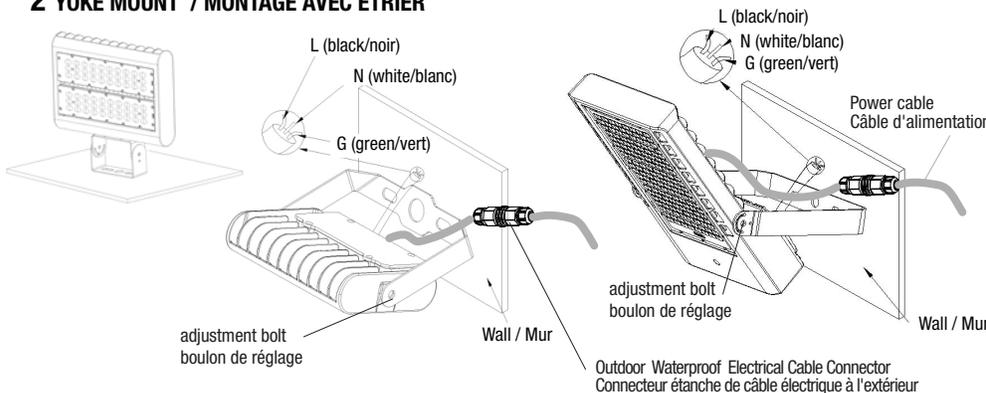

3 STRAIGHT ARM MOUNT / MONTAGE BRAS À ANGLE DROIT*

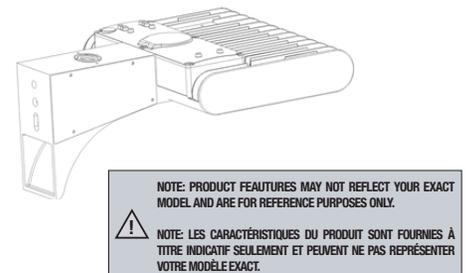

* apply only for some luminaires models
applicable uniquement pour certains modèles de luminaires